

08-16-00

PATENT

Attorney Docket No. FCENT.004A

Date: August 14, 2000

Page 1

08/14/00
JCS65 U.S. PTOA
JCS65 U.S. PTO
09/638447
08/14/00ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

ATTENTION: BOX PATENT APPLICATION

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Unknown

For: **METHOD AND SYSTEMS FOR WIRELESS COMMUNICATION FOR A FIELD SERVICE
SYSTEM**

Enclosed are:

- (X) 37 sheet(s) of drawing.
- (X) Petition under 37 CFR 1.84(b) to Submit Black and White Photo Drawings.
- (X) Return prepaid postcard.

CLAIMS AS FILED

FOR	NUMBER FILED	NUMBER EXTRA	RATE	FEE
Basic Fee			\$690	\$690
Total Claims	44 - 20 =	24 ×	\$18	\$432
Independent Claims	9 - 3 =	6 ×	\$78	\$468

FILING FEE TO BE PAID \$1,590
AT A LATER DATE

- (X) Please use Customer No. 20,995 for the correspondence address.

Jerry T. Sewell
Jerry T. Sewell
Registration No. 31,567
Attorney of Record

H:\DOCS\RAD\RAD-1471.DOC
081400

KNOBBE, MARTENS, OLSON & BEAR

A LIMITED LIABILITY PARTNERSHIP INCLUDING
PROFESSIONAL CORPORATIONS

PATENT, TRADEMARK AND COPYRIGHT CAUSES

620 NEWPORT CENTER DRIVE

SIXTEENTH FLOOR

NEWPORT BEACH, CALIFORNIA 92660-8016

(949) 760-0404

FAX (949) 760-9502

INTERNET WWW.KMOB.COM

LOUIS J. KNOBBE*
DON W. MARTENS*
GORDON H. OLSON*
JAMES B. BEAR
DARRELL L. OLSON*
WILLIAM B. BUNKER
WILLIAM H. NIEMAN
ARTHUR S. ROSE
JAMES F. LESNIAK
NED A. ISRAELSEN
DREW S. HAMILTON
JERRY T. SEWELL
JOHN B. SGANGA, JR
EDWARD A. SCHLATTER
GERARD VON HOFFMANN
JOSEPH R. RE
CATHERINE J. HOLLAND
JOHN M. CARSON
KAREN VOGEL WEIL
ANDREW H. SIMPSON
JEFFREY L. VAN HOOSEAR
DANIEL E. ALTMAN
MARGUERITE L. GUNN
STEPHEN C. JENSEN
VITO A. CANUSO III
WILLIAM H. SHREVE
LYNDA J. ZADRA-SYMEST
STEVEN J. NATAUPSKY
PAUL A. STEWART
JOSEPH F. JENNINGS
CRAIG S. SUMMERS
ANNEMARIE KAISER
BRENTON R. BABCOCK

THOMAS F. SMEGAL, JR
MICHAEL H. TRENHOLM
DIANE M. REED
JONATHAN A. BARNEY
ROYALD J. SCHOENBAUM
JOHN R. KING
FREDERICK S. BERRETTA
NANCY WAYS VENSKO
JOHN P. GIEZENTANNER
ADEEL S. AKHTAR
GINGER R. DREGER
THOMAS R. ARNO
DAVID N. WEISS
DANIEL HART, PH D
DOUGLAS G. MUEHLHAUSER
LORI LEE YAMATO
MICHAEL K. FRIEDLAND
STEPHEN M. LOBBIN
STACEY R. HALPERN
DALE C. HUNT, PH D
LEE W. HENDERSON, PH D
DEBORAH S. SHEPHERD
RICHARD E. CAMPBELL
MARK M. ABUMERI
JON W. GURKA
ERIC M. NELSON
MARK R. BENEDICT, PH D
PAUL N. CONOVER
ROBERT J. ROBY
SABING H. LEE
KAROLINE A. DELANEY
JOHN W. HOLCOMB
JAMES J. MULLEN, III, PH D

JOSEPH S. CIANFRANI
JOSEPH M. REISMAN, PH D
WILLIAM R. ZIMMERMAN
GLEN L. NUTTALL
ERIC S. FURMAN, PH D
TIRZAH ABE LOWE
GEOFFREY Y. IIDA
ALEXANDER S. FRANCO
SANJIVPAL S. GILL
SUSAN M. MOSS
JAMES W. HILL, MD
ROSE M. THIessen, PH D
MICHAEL L. FULLER
MICHAEL A. GUILIANA
MARK J. KERTZ
RABINDER N. NARULA
BRUCE S. ITCHKAWITZ, PH D
PETER M. MIDGLEY
THOMAS S. MCCLENAHAN
MICHAEL S. OKAMOTO
JOHN M. GROVER
MALLARY K. DE MERLIER
IRFAN A. LATEEF
AMY C. CHRISTENSEN
SHARON S. NG
MARK J. GALLAGHER, PH D
DAVID G. JANKOWSKI, PH D
BRIAN C. HORNE
PAYSON J. LEMELLEUR
WILLIAM G. BERRY
DIANA W. PRINCE

OF COUNSEL

JERRY R. SEILER
PAUL C. STEINHARDT

JAPANESE PATENT ATTY
KATSUHIRO ARAI**

EUROPEAN PATENT ATTY
MARTIN HELLEBRANDT

KOREAN PATENT ATTY
MINCHEOL KIM

SCIENTISTS & ENGINEERS
(NON-LAWYERS)

RAIMOND J. SALENIEKS**
DANIEL E. JOHNSON, PH D**
JEFFERY KOEPKE, PH D**
KHURRAM RAHMAN, PH D
JENNIFER A. HAYNES, PH D
BRENDAN P. O'NEILL, PH D
THOMAS Y. NAGATA
LINDA H. LIU
YASHWANT VAISHNAV, PH D
MEGUMI TANAKA
CHE S. CHERESKIN, PH D**
ERIK W. ARCHBOLD
PHILIP C. HARTSTEIN
JULIE A. HOPPER
CHRIS S. CASTLE
JAMES W. AUSLEY
R. P. CARON, PH D
JENNIFER HAYES
KIRK E. PASTORIAN, PH D
CHARLES T. RIDGELY
KEITH R. MCCOLLUM
LANG J. MCHARDY

* A PROFESSIONAL CORPORATION
* ALSO BARRISTER AT LAW (U.K.)
** U.S. PATENT AGENT

Assistant Commissioner for Patents
Washington, D.C. 20231

CERTIFICATE OF MAILING BY "EXPRESS MAIL"

Attorney Docket No. : FCENT.004A

For : METHOD AND SYSTEMS FOR WIRELESS
COMMUNICATIONS FOR A FIELD
SERVICE SYSTEM

Attorney : David N. Weiss and Richard A. DeCristofaro

"Express Mail"

Mailing Label No. : EL523236621US

Date of Deposit : August 14, 2000

I hereby certify that the accompanying

Transmittal; Specification in 48 pages; 37 sheets of drawings; Petition to Submit
Black and White Photo Drawings in duplicate; Return Prepaid Postcard

are being deposited with the United States Postal Service "Express Mail Post Office to
Addressee" service under 37 CFR 1.10 on the date indicated above and are addressed to the
Assistant Commissioner for Patents, Washington, D.C. 20231.


Richard A. DeCristofaro

H:\DOCS\RAD\RAD-1470.DOC
081400

**METHOD AND SYSTEMS FOR WIRELESS COMMUNICATION FOR A
FIELD SERVICE SYSTEM**

5

Background of the Invention

Related Cases

10

This application claims priority under 35 U.S.C. § 119(e) from Provisional Application No. 60/148,768, filed 13 August, 1999 and Provisional Application No. 60/153,321, filed 10 September 1999, both incorporated herein by reference in their entirety.

Field of the Invention

15

The present invention is related to field service, and in particular, the present invention is related to providing wireless communications for data flow to and from field service professionals.

Description of the Related Art

20

In the field service industry, a technician may spend a significant portion of his time involved in administrative or clerical tasks. Some of these activities take place away from the job site, such as receiving jobs from a dispatcher, calling in to a central office to verify the status and location of a job, and preparing and sending in time records. Other of these administrative activities may take place while at the job site, such as checking the availability or cost of parts or verifying prior history of the equipment at a job site.

25

Necessary as they are, these activities reduce the efficiency of the technician in his primary purpose: to field service the equipment at the job site. Many of these tasks are made slightly more efficient through the use of cellular phones, wireless pagers, or other wireless communications services. However, traditionally, it is still necessary for a technician to actively initiate much of the communication required for these tasks, and in many cases to contact a human operator of one sort or another at his office. This results in further lost time as the technician goes through this process, as well as

30

incurring additional cost to the office operator to provide staff sufficient to respond effectively to the information which may be needed by various technicians in the field.

A further difficulty with wireless communication systems that may be used by field service technicians is that they often require continuous contact between the office and technician in order to provide effective benefits to the technician. The connections between such wireless systems are often intermittent, complicating the communications and reducing the efficiency of the technician.

Using conventional field service wireless communication systems, if a technician using a wireless, mobile software solution is out of coverage, the software will not operate unless connected through the network. Once back in coverage, the technician must take overt action to transmit data, such as spending time downloading needed information in a batch rather than simply downloading new information. In another situation, if it is possible to queue information, the application stops processing while it waits for the technician to return to coverage. This means that while other technicians working in the field are in coverage they are not able to communicate with the home office as the application is waiting for a response from the technician who is out of coverage.

Currently, technicians are working with handheld PC's on rooftops, in elevator shafts, and other rugged environments and few technicians are proficient in their typing skills, making it difficult to use an application whose primary input method is the keyboard.

As a result, there is a need for continued improvement to wireless field service systems for mobile field service personnel to use when receiving, performing, and tracking service work from the office.

Summary of the Invention

The present invention advantageously provides an efficient, reliable method for managing field service personnel and operations. As will be described below, remote technician systems are wirelessly networked to service centers, customers, and parts warehouses, allowing information to be sent between them parties automatically. This allows a more effectively deployment of technicians and more accurate performance

and management of service operations. These and other benefits to both the field service customers and field service organizations will be described in greater detail below.

The present invention provides a system for managing field service information for an office, customer, and technician using a service center system including a database of information about the field service to be performed and the technicians available to perform it. Requests are taken from the customer by the service center system, and these requests are used to prepare work orders, which are then assigned to an available technician. The technician receives the work order and an alert that the work order has been assigned to him. At this point, the technician may perform the work order and use a remote system in order to provide information back to the service center. This information is provided automatically without any explicit activity by the technician other than following the interface of the remote system. The information is provided back to the service center where it may be used to calculate the billing appropriate to the job being performed, or to keep the customer informed of the status of the technician's work.

In a further mode of the present invention, the work order is presented to the technician along with a template of work to be performed such that the technician may only proceed through the interface of the remote system when he indicates that the appropriate steps have been completed. In this way, the work order defines a sequence of tasks for the technician and enforces the desired work flow of the field service organization upon the technician.

Another aspect of the present invention involves using a touch sensitive display upon the remote system of the technician configured to provide areas convenient to activation by the thumbs of the technician as he holds the system. By providing active areas of the screen near the vertical edges of the touch sensitive display, the technician is able to conveniently use virtual buttons placed in these regions without the need to use the keyboard or other input device of the remote system.

In another mode of the present invention, work orders are assigned to technicians by a dispatching process. Multiple field service organizations and customers may operate through a single service center system which manages their

dispatching functions. The selection of technician may be handled by either the field service organization or the service center system. However, the work order is sent to the technician from the service center system.

5 A further aspect of the present invention is a method for providing automated message queuing between a service center system and a remote system. By including a message queue and a message agent in each system communicating through a potentially unreliable channel, it is possible to provide communications which may be restarted automatically when interrupted. When used with wireless communications means, this allows for robust messaging between the service center system and the remote system even when actual communications may be intermittent. Advantageously, the remote system is capable of operating independently during times while communications are not available.

10 Methods of communicating across such a queue-based wireless system are also provided in a further aspect of the present invention. By automatically forwarding messages when available and queuing messages, work may be assigned without concern that work orders or other information will be lost in transmission.

15 In a further mode of the present invention, the technician also has the capability of automatically requesting parts or other equipment needed to perform the service at the job site directly from his remote system. This information is sent to a parts repository which responds to the technician with the cost and availability of the parts requested. In further modes of operation, the parts may then be automatically delivered to the job site for use by the technician in effecting the desired repairs.

Brief Description of the Drawings

25 The above mentioned and other features of the invention will now be described with reference to the drawings of a preferred embodiment of the present field service system. The described embodiment of the anchoring system is intended to illustrate, but not to limit the invention. The drawings contain the following figures:

FIGURE 1 illustrates the architecture of a field service management system configured in accordance with one embodiment of the present invention;

FIGURE 2 shows a typical user interface screen for the office system showing the status of a work order in the field service system;

FIGURE 3 shows a typical user interface screen for the office system showing the status of technicians using the field service system;

5 FIGURE 3A illustrates a general process for managing the operation of a technician in accordance with one embodiment of the present invention;

FIGURE 4 shows a typical user interface screen for the technician system showing the details of a customer to whom a technician is being dispatched;

10 FIGURE 5 shows a typical user interface screen for the technician system showing the description of the customer's need for a service call;

FIGURE 6 shows a typical user interface screen for the technician system showing details regarding the job provided to the technician from the dispatcher;

FIGURE 7 shows a typical user interface screen for the technician system allowing the technician to track the actual work performed while on the job site;

15 FIGURE 7A shows a typical user interface screen for the technician system allowing the technician to record any readings taken at the job site for a particular piece of equipment;

20 FIGURE 7B shows a typical user interface screen for the technician system showing various diagnostic actions to be performed while working on the equipment at the job site;

FIGURE 8 shows a typical user interface screen for the technician system showing various tasks for the technician to perform prior to leaving the job site;

FIGURE 8A shows a typical user interface screen for the technician system showing the current time log of the technician for review;

25 FIGURE 8B shows a typical user interface screen for the technician system allowing the technician to sign his time sheet via the mobile system;

FIGURE 9 illustrates the architecture for a wireless communication system for use between a service center system and a technician system in accordance with one embodiment of the present invention.

30

Detailed Description of Preferred Embodiments

The following description and examples illustrate preferred embodiments of the present invention in detail. Those of skill in the art will recognize that there are numerous variations and modifications of this invention that are encompassed within its scope. Accordingly, the description of preferred embodiments should not be deemed to limit the scope of the present invention. Reference numbers are used to indicate items in the included figures. Reference numbers are reused between figures to indicate the same item.

OVERVIEW

The present invention advantageously provides an efficient, reliable system for managing field service personnel and operations. As will be described below, by wirelessly networking remote technician terminals to service centers, customers, and parts warehouses, information may be sent between these parties automatically. This allows technicians to be more effectively deployed and service operations to be more accurately performed and managed. In this way, both field service customers, and field service organizations benefit.

As illustrated in FIGURE 1, one embodiment of the present invention may comprise a distributed system having several components. Viewed broadly, these components comprise equipment which is distributed among multiple users, these users including one or more service centers, one or more home offices, one or more customers, and one or more mobile technicians. Further embodiments may also include equipment used by a parts vendor at a parts repository. The equipment generally comprises computer systems configured to interact with the other computer systems of the present invention. The computer systems for the home office 120, customers 130, parts vendor 150, and technicians 140 are connected to the service center system 110 via various communications media 160, 170 as will be discussed in greater detail below.

As used herein, 'computer' or 'computer system' is used to refer broadly to any data processing system or terminal. The exemplary computers described herein may be small business computers such as a PC or Macintosh computers as well as servers which are in use at a particular site. However, those skilled in the art will recognize that other

types of computer system are possible and may be used in different circumstances. These include without limitation: multi-user computer systems, systems based upon platforms other than Macintosh or Intel architectures, enhanced telephones and pagers, personal digital assistants, interactive audio and video kiosks, interactive television systems, handheld computers, personal digital assistants, and such other devices as are known in the art.

In some particular applications, it is significant that a mobile or portable computer system is used. In particular, a computer system in use by a technician is advantageously a mobile computer. The present invention is not limited to embodiments as are described below in which a portable computer is used as the technician's system; however, for certain applications, the use of wireless portable computers offers significant advantages. Those of skill in the art will recognize that a 'portable computer system' may include without limitation: an enhanced cellular phone or paging device, a personal digital assistant, a handheld computer, a laptop computer, a computer embedded in another device such as a clipboard, a wearable computer, a tablet computer, or any other such device as in known in the art.

The functions described herein to be performed by the various computer systems are accomplished through the use of appropriate programming of the computer systems. This programming may include a series of software modules or other files which may be loaded onto the particular computer system on which the software is intended to run. However, those of ordinary skill in the art will recognize that the term 'software' as used herein broadly refers to any sort of programming applied to a computer system, and may include without limitation: user-loaded program modules, memory resident programs, programs loaded onto removable media, programs loaded into firmware or other non-volatile storage media, custom configured operating software, and other such programming techniques as are known in the art.

In all of the embodiments described herein, the various systems pass information to each other across communications media of different types. In one embodiment, the communications media 160 used to communicate between the office, service center system, customers and parts vendor comprise computer networks and the Internet; the communications media 170 between the service center system and the technician is

generally a wireless network in one mode of operation, such as CDMA networks, microwave networks, or wireless DSL networks. However, other communications media may be used for various connections between the systems. These can include without limitation: land line telephone connections, analog or digital cellular telephone connections, radio frequency communications, pager networks, television cable networks, and other forms of communication as are known in the art. In addition, the computer systems may optionally be capable of switching from one communication medium to another.

As mentioned above, the primary components of one preferred embodiment of the present invention comprise five types of interconnected computer systems, each configured for use at a different point of the field service operation. These systems correspond to: the office, the customer, the parts repository, the service center and the mobile technician. Each of these systems will be discussed below.

Office (Field Service Organization)

The home office, referred to hereafter as simply the "office," is run by a field service organization (FSO). An FSO is a company that performs some form of on site service to a customer base. This could include businesses such as HVAC or plumbing repair or similar building maintenance companies, remotely dispatched auto service, copier service, computer support, or such other field service industries as are generally known to those in the art. The office represents the FSO's access to the entire field service management system described herein. Although there may be multiple offices from which the functions of the office may be performed, any FSO using an embodiment of the present invention generally has at least one office system in order to get information into and out of the field service system described below, and in particular, into and out of the service center system.

The FSO performs the personnel and administrative functions that are normally part of running a field service business. However, much of the information related to these functions is entered into the field service system of the present invention. For example, the FSO would hire technicians and enter into service contracts with customers just as they normally would. However, information regarding each

technician and each contract with a customer would also be entered into the office computer system which is part of the field service system. This information is used to coordinate and automate many processes of the field service system as described below.

The office system 120 may also be used in order to extract information generated or tracked through the field service system from the service center system 110 (described below). This may include such information as the current status of a particular technician, or more general data regarding the current status of technicians. Other information which may be produced includes without limitation: billing information related to particular contracts, time sheets for individual technicians, status information for particular contracts, progress information for particular work orders, and such other information as would be normally used in the art.

Generally speaking, the office system is the main or only direct means in which the FSO needs to interact with the field service management system. This interface is designed to allow the office to update information in the databases of the service center system as necessary. These updates may include information regarding new customers of the FSO and each new customer's identifying information. It is also possible for information on new technicians to be uploaded to the service center system in order to reflect the changes in personnel of the FSO.

Another important function of one embodiment of the office system 120 is to allow real-time queries to be made to the service center system 110 which give the office information that the FSO needs in order to operate its business successfully. This information includes such data as the current status of a particular technician, the current status of a particular work order (see FIGURE 2), or the current status of all technicians (see FIGURE 3). Other types of information that may be useful include billing records for clients, and the list of currently requested service that has not yet been dispatched to a particular technician. Work order dispatch functions may be handled by the office system in certain embodiments of the present invention. This will be discussed in greater detail below.

Customer (Client of the Field Service Organization)

The customer is the individual or company who is in need of field service. The customer may have contracted with the FSO prior to the need for service and established terms for such service in advance. In such circumstances, the customer may also provide information regarding the sites to be covered by the service contract and information regarding who to contact when arriving at a job site, and any necessary information about each job site. The customer may have a relationship where they pay a fee for on-call service, or they may simply pay for work performed as it is needed.

In other modes of the present invention, the customer may not have a pre-existing relationship with the FSO, but may be contacting the FSO for the first time when the customer requests service. In these cases, although the process is significantly the same, it may be advantageous for the customer to provide additional information to the FSO at the time of the service request, *e.g.* where the job site being serviced is, who to contact, who is allowed to sign off on work performed, etc.

The customer system 130 is a computer system used by the customer which allows them to interface with the service center system 110, as will be described below. The customer will interact with the system in order to request field service, give information related to the desired service, and to receive billing information related to the work done.

The customer system 130 is configured to perform these functions by logging onto the service center system 110. The customer system is configured to perform this function by a software application which is run on the customer system that communicates across a communications medium to the service center system. The communications medium 160 is generally some form of wired internet service, but as discussed above, those of skill in the art will recognize that other communications mechanisms are possible.

In a particular embodiment of the customer system, the customer system comprises a web-based application which runs upon a computer which is connected to an Internet Service Provider (ISP) of the customer's choice. In this embodiment, the service center system is connected to the Internet as well. Information is sent from the customer system to the ISP, who forwards the information to the service center system

via the Internet. Information flows back to the customer system from the service center system via the ISP as well.

Parts Repository (Supplier to the Field Service Organization)

5 The parts repository 150 handles the replacement parts which are needed in the course of field service work. The parts repository may be run by the field service company in one mode of operation of the present invention. In this mode, the parts repository represents the inventory and supply function of the field service company itself. In other modes the parts repository may be run by independent parts suppliers
10 who provides parts to the field service company, or even by groups of different parts suppliers who supply the field service company independently. These could represent the manufacturers of the equipment in certain modes of operation. In other modes of operation, the parts repository may comprise one or more organizations under contract with the field service management organization.

15 In one embodiment, the parts repository is run by a company who enters into a business relationship with the field service management organization to provide parts catalogs and real time pricing and availability information to the service center system. Physical distribution outlets may be located throughout the region in which field service is being performed. This enhances the ability to provide expedited or automatic
20 procurement of replacement parts and equipment for the customer through the operation of the technician system as will be described below. Another means in which the physical distribution of parts from a parts repository may be handled is through the use of a wirelessly networked mobile warehouse. Such a mobile warehouse may comprise a truck or other vehicle which keeps a supply of commonly needed parts available and
25 which delivers them directly to job sites or technicians upon appropriate request.

 In such modes of operation, the parts repository 150 is linked to the service center system 110 in order to provide current information on the availability of parts, as well as to allow for immediate ordering and shipment of parts in response to equipment needs discovered on the job site by the technicians. The use of expedited parts
30 procurement will be discussed below.

Service Center System

As shown in FIGURE 1, the service center system 110 may be used as a clearing house and data storage and forwarding area for the communications which will take place between the other systems described. Generally, the other equipment is configured to communicate with the service center system exclusively, and the service center system is used to coordinate and control the information which is distributed to the various other systems. Those of skill in the art will recognize that some embodiments need not restrict communications to those to and from the service center system, but rather may allow direct data exchange between a technician and the office, for example.

One purpose for which the service center system is configured is to store information which is received from the other systems. This information can include information which is sent from the mobile technician systems 140, such as the current status of a job which is being performed, or an inquiry as to the availability of certain parts needed for repairs. The service center system 110 may also receive requests for information or updates from the office system 120. This information may include such data as new information related to a new customer or a new technician, as well as information related to the particulars of a particular customer or technician, such as the billing rate of the technician or an updated address for a particular customer. This information is stored in a database 180 or other storage media accessible to the service center system 110.

The service center system 110 need not be run by the field service company itself. For example, in one embodiment, the service center system is located and run by a field service management company independent of the field service company itself. Such a company provides or leases the appropriate equipment to a field service company under contract, and that equipment interacts with the service center system in order to carry out the steps needed to manage the field operations of the field service company.

Those of skill in the art will recognize that in some modes of operation, it may be desirable for a field service company to set up and operate its own service center system, rather than contracting this to an independent field service management

company. This may be particularly advantageous when the field service company is large or has particular requirements beyond the ordinary customizations available to clients of the field service management company. In situations such as these where operation of a service center system dedicated to the operation of a single field service company is desirable, the service center system may be assembled or purchased and owned by the field service company itself, rather than the field service management company.

In embodiments where the field service company also owns the service center system, there is no need that the office system and service center system be physically distinct. In these situations a single piece of equipment may be used for both functions. However, this is not required and as discussed above, those of skill in the art will recognize that multiple office systems may be used with a single service center system, even for a single field service organization.

In embodiments where the field service management company runs the service center system to coordinate the service operations of the field service company, multiple field service companies may be run by the same field service organization. Each of these field service companies independently contracts with the management company, and each has their own offices, customers, and technicians. Different field service companies operating through the same service center system may even have different parts repositories. The information for each different field service organization is only available to the other components of that FSO's system.

For example, if a particular service center system was managing service for both company ABC and company XYZ, data for both companies would be present within the service center system, and the same types of operations would be performed on data from both companies. However, optionally only data related to the technicians and contracts of company ABC would be available to the office system of company ABC, and job and contract data from the office of XYZ would only be available to the technicians of company XYZ. Although the same service center system would be used for both, each FSO would interact with it independently of the other.

The service center system is in communication with the previously discussed systems, *i.e.* the office 120, the customers 130 and the parts repository 150, by

communications media 160, 170 as discussed briefly above. In a one mode of operation, the communications between these systems is carried out via the Internet. The communications between these systems is carried out using Web-based protocols on the internet, such as HTTP (HyperText Transport Protocol) and HTML (HyperText Markup Language) and using scripting and data exchange formats suited to the Web, such ASP (Active Server Pages) and SSL (Secure Sockets Layer). Those of skill in the art will recognize that other networks and protocols may be substituted for those listed above while carrying out the functions of any of the described embodiments of the present invention and that the choice of such alternate techniques is based upon the circumstances of the use of the system, and not upon the nature of the invention itself.

One advantage of the described embodiments of the present invention is that a field service management company can provide operational control over the work of multiple FSO's simultaneously, and distribute this information directly back and forth to the various FSO's using only an Internet connection for each site. This improves reliability and accessibility of such services to the FSO's as dedicated hardware or communications lines are not required.

Technician (Employee of the Field Service Organization)

The mobile technicians are employees or contractors working for an FSO. They perform the actual work at job sites which require service. Unlike the equipment used for the previously discussed systems, it is highly desirable that the equipment used by the technician as part of the field service management system be portable. Furthermore, it is desirable that the equipment used by the technician be as easy to operate as possible without the use of additional devices, such as a computer mouse, or separate keyboard or any other devices connected by cable or the like which may be cumbersome to use in a mobile environment. The portion of the present system which is used by the technician is referred to herein as the "technician system" 140 or "remote system."

One embodiment of a technician system 140 comprises a small portable computer with an integrated input device, such as an integrated keyboard, pointing device, or touch screen. For example, the technician system may comprise an HPC (handheld personal computer) running Microsoft Windows CE as its operating system.

004730-0436

The HPC is configured to operate with the described embodiments of the field service management system with software which provides the desired information flow to and from the unit, as will be discussed below. Of course, other portable computer systems may also be used, including system using other operating systems, such as Windows 98, Windows 2000, Windows NT, Linux or other UNIX variants, the Palm OS, BeOS, Mac OS, or EPOC.

The technician system communicates with the service center system via communications medium 170 as described briefly above. However, as the technician system 140 is generally mobile, it is desirable for the communications between the technician system and the service center system 110 to accommodate this mobility. In one embodiment of the communications media between the technician system and the service center system, wireless communication is established using a non-dial-up wireless connection, such as RAM, Artis, or other "always on" wireless networking protocols. In other modes of operation, the technician system may communicate with the service center system via an ISP using a dial-up connection and a cellular modem, or even by dial-up land line when available (for instance, when at the job site). As discussed above, those of skill in the art will recognize the availability of alternate communications media of similar function to those listed above which would be equally well suited to particular aspects of the present invention.

Furthermore, it is desirable for the communications between the remote system and the service center system to occur automatically without explicit communication related commands from the technician or any other user. For instance, as soon as there is updated status information available to the remote system, this information should be automatically sent to the service center system. Similarly, as soon as the service center system has updated information for the technician system, such as a new work order, it should be loaded onto the technician system without a need for the technician to instruct the system to find new assignments for him. In this way, the automated communications between these systems eliminates the complications, additional steps, and potential failures of communication due to requiring the technician to explicitly instruct his system to contact the service center system.

Advantageously, one embodiment of the remote system is an HPC which includes a wireless communications device which communicates using a non-dialup protocol, such as a wireless alphanumeric pager protocol or a wireless Internet access protocol, so that communications between the technician system and service center system are automatic and transparent to the technician using the system.

Note that throughout the description of the above systems, the systems referred to are logical divisions based upon the functions performed. In some embodiments of the present invention, it may be advantageous for one or more of these systems to be part of the same computer system, or physically located at the same site.

For instance, in circumstances where a FSO purchases their own hardware and software to handle the service center system functions, it is quite likely that at a minimum, the service center system will be physically located at the same site as at least one office system. Furthermore, it may be the case that the service center system and office system comprise the same physical system, which performs both sets of functions.

When multiple instances of a particular system are used, *e.g.* multiple offices or multiple parts repositories, it may be the case that one of such systems may be combined without one or more of the others. For instance, a system comprising a single service center system, three office systems, and four parts repositories (as well as some number of technicians) may be configured such that one of the offices is combined with one of the parts repositories, and the service center system is combined with both a parts repository and an office.

Those of skill in the art will recognize that these and other combinations of the systems described may be combined at a single location or into a single physical system in alternate embodiments of the present invention.

OPERATION

One mode of operation of the system described above will now be described to show how management of a field service system is provided. Prior to performing a typical field service call, the management system as a whole is properly configured. This involves loading information regarding each of the existing job contracts and job

004730 244850

sites into the service center system from the office, as well as information describing the service technicians themselves, such as their billing rate and employee ID number. This information may be loaded into the service center system initially, and then updated whenever it changes from the office system. In this way, there is no need for the FSO to actually send anyone to the service center system site at any time to update information.

For the discussion which follows, it will be assumed that an FSO has already arranged with a field service management company to have field service management provided through a service center system, and that technician and contract information have already been loaded onto the service center system by the office.

Field service requests are entered into customer systems by the customers as they are needed. For instance, if the boiler is running poorly, the customer may enter an appropriate request into their system. This information is sent to the service center system which acknowledges the need for a service call to this particular customer site, and appropriate information related to this customer and job site is extracted from the database of customer information on the service center system or on the mobile technician system. This information can include without limitation: the address of the customer site; the history of work performed at that customer site; the billing arrangement between that customer and the FSO; the type of repair associated with this sort of problem; the address of the work site (if different from the billing address of the customer); the urgency of the problem; any special preparations that are needed prior to beginning work; or such other information as is known by those of skill in the art.

Once the appropriate information is collected into a complete work order, it is ready to be dispatched to a technician. In one mode of operation, work orders are dispatched to technicians by the service center system directly on behalf of the office. In an alternate mode of operation, dispatching of work orders may be handled by the office. In either case, the operation to take place is similar: the open work order is matched up with a currently available technician to perform that work. Once a technician is chosen for that work order, the information on the work order is sent to the technician system for access by the technician. This information is automatically loaded onto the remote system corresponding to the appropriate technicians and the

electrical repair, industrial machine servicing, elevator repair, business machine repair (e.g. copier repair), interior plant care, computer repair, telecommunications repair and such other fields that use mobile service technicians as are known in the art.

5 Note furthermore that much of the template of information which is desirably collected from and forwarded to the various parties such as the office and technician will vary with the type of field service system being created. Much of this information can be created or customized by the office so as to reflect the FSO's particular approach to field service.

10 Furthermore, it is possible that the work flow which is defined using the templates of information sent and the customized user interface upon the remote system can be set up so that each individual part of the system is either mandatory or optional. This may be configured by the FSO in order to more properly control the work being performed by their technicians. For example, if the FSO wants to make sure that certain information is reviewed by the technician before moving on to other parts of the work
15 flow, then that particular item may be made mandatory.

For example, a particular FSO working in the HVAC repair field might find it advantageous to always have the technician perform a measurement of the power available to a ventilation system before proceeding any further with any diagnostic tasks (as will be described below). In order to do this, the system may be configured such
20 that particular readings must be filled in by the technician in the "Readings" portion of the interface before the technician may proceed to the "Diagnostics" portion of the interface. Other mandatory actions might include portions of the "Wrap-Up Checklist", such as the entry of "Recommended Repairs", and the capture of a customer signature before time at a job site can be considered complete.

25 Other actions which may be recorded within the interface of the system may be optional. These activities, for instance, adding additional notes on a piece of equipment, need not be performed in order to move ahead in the interface of the remote system. By selecting which steps are mandatory and which are optional, the FSO may customize the interface of the remote system so as to most accurately reflect the work flow of their
30 operation and most fully support their business model. The description which follows

gives only a single example of a possible work flow and the associated interface for an HVAC servicing business, as indicated with reference to FIGURE 3A.

The general sequence of the work flow begins when the work order is received by the technician (300). The status of the technician is automatically updated by the remote system (305), and once on site (310), the technician performs the required work (315).

The technician is led through the steps of the process via the interface of the technician system 140. This guides him through the process of determining which equipment to check (320), taking readings (325), performing diagnostic activity (330), performing maintenance tasks (335) and determining what parts are needed to effect the necessary repairs (340).

Once the work is done, an appropriate "wrap-up" process is presented to the technician for him to perform (345). This includes reviewing the work order summary (350), adding notes for the office (355), documenting any additional charges which must be made to the client (360), following a checklist of necessary wrap-up activities (365), recommending repairs to the customer (370) and preparing the final work order report (375).

Once the work order report is prepared, it is reviewed by the customer and signed (380), which allows the work order to be closed out (385). These steps will be described in greater detail below.

The technician begins each work day by powering up his system, which will automatically communicate this fact with the service center system, thereby designating the technician as available for assignment. In alternate embodiments the technician may be required to explicitly log on initially to designate himself as available or to enter a password or perform some other security or authentication process. However, generally, once the technician system has been activated, the technician is considered to be available for assignment.

Note that once the technician has activated his system, there is no need for him to directly request any form of communication between the remote system and the service center system. All communications will occur automatically whenever a wireless connection is available between the technician system and the service center

system. However, in circumstances where a wireless or other “always-on” connection is not available, the remote system may include the capability to explicitly contact the service center system to exchange information across connections such as a dial-up cellular modem or a land-line telephone connection. Although these connections may be made automatically once an appropriate line of communication is available (*e.g.* once a land-line is connected to the remote system), the connection to such an on-demand only communications medium may require an explicit step by the user.

When the service center system receives notice that a particular technician has become available for assignment, or is available for assignment at the date and time at which it is desired to perform the work, the service center system will update the technician availability information recorded in its database. This information will be available to the office (see FIGURE 3) and will be used by the office for dispatching purposes in modes using office dispatching. This information is used by the service center system to choose a technician for this work order in modes using service center system dispatching. In either case, once a technician is assigned to a particular work order, this information is recorded by the service center system, and the work order is sent to the technician system via the communications media.

The work order will automatically pop up on the technician system screen when it is received, as shown in FIGURE 4. This shows a typical work order as the technician will have access to it on his system. This screen shows the basic information related to the work order, which is displayed under the “DETAILS” tab 410 on the technician system, such as the location at which the work needs to be performed, and the person who the technician must contact at the work site prior to beginning work. Additional details may be provided as necessary. The information shown in this and all figures is intended to be exemplary, rather than limiting, and is not intended to restrict the scope of the claimed invention. Alternate configurations for displaying this information to the technician may also be used as will be understood by those of skill in the art.

Note that this includes both visual and textual aspects of the interface presented to the technician. For instance, the names used in labeling various buttons and actions on the screen of the technician system may be altered without altering the fundamental

nature of the invention presented herein. Therefore, those of skill in the art will recognize the interchangeability of certain features of the interface discussed below with other similar elements as are known in the art.

In cases where the technician is not currently listed as active for the targeted time for the job to be formed, but is not currently active, a work order may still be assigned to that particular technician for dispatch. In these cases, the technician system will not receive the work order until such time as it is powered up and it connects to the service center system across the communications media.

In addition to the basic information displayed on the technician system shown in FIGURE 4, virtual buttons are available which allow the technician to get further information as it is required and appropriate to the task at hand. For instance, in addition to specifying the address of the site at which the work is to be performed, a button labeled "View Map" 420 is provided which will prepare and display a map to the work site upon the screen of the technician system. Of course in addition to or in place of the virtual or "soft" buttons, other techniques may be provided for users to enter data or control the functions of the technician system. For example, drop down menus, "hard" or physical keys, or voice input may be used as well.

This map may optionally be linked to a locator service which allows the system to determine the location of the technician system and thereby display a more useful map. For instance, if the technician system is located 30 miles from the job site, a map which is zoomed out to a large scale may be the most appropriate display for leading the technician to the job site. Conversely, when the technician system is located within a mile of the job site, a map of smaller scale showing individual streets may be displayed to guide the technician directly to the proper address.

Such location services may be provided by Global Positioning System (GPS) units either embedded or attached to the technician system, area navigation systems such as LORAN which may be mounted on vehicles, tracing features which may be available through wireless communication networks, or such other means as are known to those of skill in the art.

Additional buttons or other user input may be provided as shown to allow the technician to find alternate contacts at the job site if the primary contact is unavailable,

as well as information related to the job site itself. This may include information which has been entered by the customer himself during the request for service (*e.g.* don't park on the street), or by the office when they set up the contract (*e.g.* always show your employee ID to the guard when you sign in). Information recorded by previous technicians working at that job site may also be included when appropriate (*e.g.* be careful of beehives near roof access). All of this information is available to the technician immediately upon receipt of his work order, allowing the technician to waste no time in proceeding to the job site aware of what needs to be done.

In addition, information regarding customer information and equipment catalogs and lists of data (such as Readings, Diagnostics and Tasks as will be discussed below) are optionally stored in the technician system at all times, eliminating the need to download this information from the service center system with each individual work order. This information is periodically updated by the service center system, but in general, is available at all times on the technician system for more rapid response and reduced bandwidth consumption of the communications media. This can be particularly important when the communications media is of low bandwidth, such as the alpha-numeric pager network or when the network connection is interrupted.

In general, the interface of the technician system is laid out such that important information is generally accessible by simply touching the item on the currently visible screen about which more details are desired. For instance, as discussed above, the buttons available on the interface screen shown in FIGURE 4 are arranged such that more details on the location, contacts or job site information are available by using the "View Map" 410, "View All Contacts" and "View Site Profile" buttons.

Furthermore, in one embodiment of the present invention, the interface is designed so that the buttons which are most often used in the course of progressing through the interface of the technician system are positioned for easy access by the thumbs of the technician while using the system. To accomplish this, the available buttons are generally laid out along the left and right vertical edges of the touch-sensitive display. In this way, the technician may hold the remote system in his hands and navigate the interface with his thumbs, without having to let go of the device with either hand. This may be particularly advantageous when the technician is working in

an environment in which it is not convenient to put down the remote system in order to operate it.

In an additional mode of the present invention, the interface of the technician system may be designed to provide at least two general navigation buttons, one on each side of the touch sensitive display. As above, these buttons are desirably positioned such that one is accessible by the left thumb of the technician while holding the device, and the other is accessible by the right thumb of the technician. One button is generally programmed to advance the cursor or selection on the current screen when used, and the other is programmed to bring the cursor back to a previous selection or position. In this way, the available choices on the screen may be navigated by the technician using his thumbs without requiring all choices to be located at the lateral extremes of the screen.

A "STATUS" button 430 is also located at the upper right of the screen as shown in FIGURE 4. This button is available in all screens of the technician system and allows the technician to enter his current status by checking off the appropriate box on a pop-up form. When clicked or touched, the "STATUS" button causes a box to pop up which lists the available states for the technician: available, in route, at job site, off duty, getting signature, and such other states as may be useful to the office. This list of available states may be customized to suit particular FSO's and the types of work they perform.

Generally, the technician system will be able to determine the technician's status by tracking the operations which are being performed with the technician system. For instance, if the technician system is off, the technician status will generally be considered to be "off-duty." If the system is being used to review an upcoming job and the technician is not currently on another job, the technician is "in route" to the next job site. If the technician is entering the details of the work he is performing, the technician is "at job site." As often as possible, the system will update the status of the technician based upon the actions being performed using the system.

However, not all circumstances allow the technician's state to be conveniently determined by the system. In these case, it is desirable to allow the technician to enter his current status manually. By touching or otherwise actuating the "STATUS" button, the technician may view his current status and update it. When he changes the status

and exits the status pop up window, the new status and the time at which the status was adjusted will be forwarded to the service center system. In this way, this information can be used to update the information available to the office, as well as to update the information needed to properly perform dispatching of new jobs.

5 Basic status information is available at all times in the title bar of at the top of the display on all screens of the technician system. The information shown includes the current work order number or other identifier, as well as the current state of the technician, and the time since the job began. The status shown in FIGURE 4 shows Work Order # 1001406006, the technician's status as "At Job Site" and the time since
10 the job began as 4 minutes (00:04).

 As shown in FIGURE 5, the tab next to the "DETAILS" tab is the "PROBLEM" tab 510. When this tab is touched, it brings up a window which shows the description of the problem reported by the customer. This description is entered automatically into the work order based upon the original report of the problem from the customer. This
15 screen also includes a "REQUEST HISTORY" button 520 which will produce a listing of previous work problems reported and work performed at this job site. This information can be extremely useful in diagnosing a current problem.

 In addition to the information presented on the "PROBLEM" screen, the technician system also has further information available if the technician chooses the
20 "JOB NOTES" tab 610. A typical screen that would be seen under this tab is shown in FIGURE 6. This screen shows notes which have been included for the technician by the dispatcher beyond the information that was submitted by the customer in reporting the problem. This information is generally extracted from the database of information associated with the particular customer on the service center system.

25 For instance, if the customer is located in a windy area which makes working on rooftop ventilation equipment difficult, information could be entered into the profile for the customer which reminds the technician to bring safety lines if work is to be performed on the rooftop equipment. Similarly, if there are special procedures which must be followed to access the building or get in touch with the contact person, such
30 information could also be included here, as shown in the "Special Notes from Dispatch" box on the "JOB NOTES" screen in FIGURE 6.

This screen can also be used to present information which is associated with the particular type of equipment being serviced. For example, if the original problem report from the customer stated that their Brand X Model 17 fan system was broken, information regarding precautions necessary to take when servicing a Brand X Model 17 could be included when the work order is prepared for the technician. This can be desirable when the equipment to be serviced requires special tools or equipment to service which are not normally used on a service call.

The "JOB NOTES" tab 610 also includes a button to get further information regarding the other technicians who may have been assigned to this particular work order by the dispatcher. By pressing the "View Techs Assigned" button 620, a listing of all of the technicians assigned to this work order will be shown. Such a listing can be useful so that a given technician may coordinate his activities, such as travel, with other technicians so that they each use their time on the job site most effectively.

FIGURE 7 shows a typical screen of information that may be seen under the "WORK PERFORMED" tab 710 of the technician system. This screen is used to guide the work performed by the technician while on site, as well as to document and memorialize the actions taken by the technician in diagnosing and repairing the reported problem. This screen also includes access to important deeper layers of information and processes that are beneficial to the technician in diagnosing and correcting problems on site.

The general structure of this screen is a list of the equipment on which the technician performs an inspection or any other work. Initially, when this screen is presented, it will be blank, *i.e.* it will not yet have any equipment listed on it. When the technician begins to work on a particular piece of equipment, he first clicks on the "Equipment List" button 720 located in the row above the (currently blank) list of "Equipment Worked On." When this button is selected, a list of all of the equipment known to be included within the contract between the FSO and the customer will be shown, and the technician can choose from that list the particular piece of equipment on which he is working.

This list of equipment on site and under contract is available because when the initial contract was set up, the customer will have made arrangements with the FSO to

provide a list of the equipment for which service is being contracted. In other modes of operation of the present invention, the detailed list of equipment on the customer site can be produced by a technician who performs an inspection of the customer site and then sends back the list of equipment for inclusion within the customer profile within the database of the service center system.

Once the appropriate piece of equipment is selected, the technician system returns to the screen shown in FIGURE 7, including the selected piece of equipment within the list of "Equipment Worked On." A group of further choices now appears to the right of the listed piece of equipment. These choices, labeled "Readings" 730, "Diagnostics" 740, "Tasks" 750 and "Parts" 760, represent the fundamental steps that are undertaken by the technician when working with any piece of equipment. First, the equipment is examined and basic information regarding its operation is noted (Readings); then specific items are verified off of a checklist in order to determine where the fault lies (Diagnostics); then typical maintenance actions are performed which are known to be effective on that equipment (Tasks); finally, a replacement part is selected and ordered if it is needed (Parts).

A typical screen which is shown in response to the "Readings" button is shown in FIGURE 7A. As can be seen at the upper left region of this screen, there are several tabs with different headings, such as "Cond Unit," "Elec," "General," and "Notes." Each of these tabs brings up a list of readings which are related to the particular piece of equipment selected and also to the particular category listed. These lists are fully customizable and are all taken from a catalog of appropriate readings for each different piece of equipment on the job site, and which is stored on the service center system and forwarded to the technician system as needed.

In one mode of operation, some or all information related to equipment on the job site is forwarded to the technician along with the work order. In this way, if communication between the technician system and the service center system is interrupted due to the technician system being out of range of the communications media or interference due to the environment in which the technician is working, the information needed by the technician is already loaded onto the technician system and available for use.

Space is provided in each of the "Readings" screens for the technician to enter the measured values of the readings taken. In addition to this space providing a pre-formatted place for the technician to provide readings 735, 737 as they are taken, the list of readings provides a guide to the technician of what he must do. For example, if the technician has not found the problem or a lead to the problem in the first few readings he takes, the list found on each tab can lead him to take all of the normally available readings in order to more fully document the behavior of the troubled equipment.

This screen also includes a "Notes" tab, which brings up a window which includes a space for the technician to record any other information related to the readings taken which does not belong in the space provided, *i.e.* any information other than the actual values of the readings taken, such as "funny sound while taking high side pressure measurement" or "crankcase discolored near back connection." A "Notes" tab is found on several other screens within the technician system to allow the technician to make notes wherever they are appropriate in the process of performing work on site (see FIGURE 7B).

When the technician has completed taking any necessary readings, he can proceed back to the screen shown in FIGURE 7. As each of these pop up lists is completed, that item is now shown with a check mark next to it, as shown in FIGURE 7 for Readings, Diagnostics, and Tasks. The technician may now click on "Diagnostics." This will cause the technician system to produce a window similar to that shown in FIGURE 7B, the "Diagnostics" window.

The Diagnostic window is set up in substantially the same manner as the Readings window, except that the tabs listed each show different aspects of the equipment which may cause failures and which the technician should check. These lists and categories of items to check are also taken from the appropriate equipment catalog in the service center system.

Since there are no values to enter in the Diagnostics screen, each item has a checkbox 745 which can be checked off once the particular diagnostic action is taken. As shown in FIGURE 7B, the equipment has been checked, and it has been discovered that the problem is that the belt is not properly in position.

When the appropriate diagnostic actions are taken, the technician can return to the previous level by hitting the "OK" button 748 in the upper right of the screen. At this point, the "Diagnostics" block will also become checked off on the "Equipment Worked On" screen (see FIGURE 7).

5 The technician will then click on the "Tasks" button 750, which will produce another window of the same type as that shown in FIGURES 7A and 7B which will display a tabbed list of maintenance tasks for the technician to perform before completing work upon this unit. The information for these lists is also taken from the service center system database as described with relation to the "Readings" and
10 "Diagnostics" screens. This screen may also include a "Notes" tab in one mode of operation to allow the technician to record additional actions taken or note unusual results while performing the desired actions.

 The final block to the right of the line detailing this piece of equipment is the "Parts" button 760. This button takes the technician to a screen which allows the
15 selection and ordering of a replacement part to be used with this piece of equipment (if necessary). When this button is pressed, the system interfaces with the appropriate parts repositories and its interface, as will be discussed below. Note that if there are no new parts to order, then there will be no need for the technician to press this button.

 Also provided in one mode of operation of the technician system is a
20 "Equipment History" button, which allows for the history of any particular piece of equipment on the job site to be recalled for review. In this way, it will be possible to determine, for example than the particular unit being examined has been replaced three times in the past two years, or perhaps that on all previous work orders, this unit has needed a particular adjustment.

25 This process described above is repeated as necessary for each piece of equipment which is examined or worked on by the technician. When the technician has no more equipment which needs work, he can continue on by selecting on the "WRAP UP" tab. This will lead to a screen such as is shown in FIGURE 8.

 This screen provides a number of buttons which provide access to functions
30 which are used in completing the information necessary for the technician to perform before preparing the finished work order report and getting a signature from the

customer. As shown these include the Work Order Summary, Notes for Office Only, Additional Charges, Wrap-Up Checklist, Recommended Repairs, Work Order Report, and Customer Signature. These functions will each be discussed briefly below.

The Work Order Summary is a listing which is generated based upon all of the recorded information produced and recorded upon the technician system at the job site. This produces a line-by-line summary which includes such information as the time of arrival of the technician to the job site, the name of each piece of equipment inspected, the specific measurements made and the values of the readings taken for that equipment, the diagnostic activity performed, the maintenance tasks performed, and the replacement parts ordered, if any. This information is listed for each piece of equipment which was worked on. Additionally, any notes entered by the technician in the "Notes" screens will be entered here as well.

The end result is a complete listing of the detailed activities of the technician. This is beneficial as it not only provides an audit trail, but it also makes it clear to the customer what work was done by the technician and what was discovered. This level of detail provides a more satisfying record for the customer and helps the FSO maintain its clients. Any changes to the summary that need to be made may be made on this screen in one mode of operation of the technician system.

The Notes for Office Only function is used to add notes to the work order summary that will only appear on the copy of the work order that is sent to the office and service center system, but not on the copy that the customer receives. This function is useful for appending information that is either unrelated to the customer specifically (for example, if the technician was late to the job site because of construction on the highway) or information which does not belong upon the customer copy of the work order report (for instance, a note that from now on the technician should try to speak with one particular contact person and not another).

The Additional Charges function is used if additional fees must be added to the amount billed to the client for this work order. Since charges based on the technician's time spent on the job site and charges for the parts ordered are all included within the automatically tabulated fees, the Additional Charges area may be used for other costs which are to be charged to the customer. For instance, if the customer is located in a

distant region and a surcharge is added for such travel, this could be entered using the Additional Charges function.

The Wrap-Up checklist provides a screen with a list of action items to be performed by the technician before considering the job complete. This is a list which can be loaded and customized based upon the customer, the technician, or generally for the entire business of that particular FSO. This could include such actions as making sure to speak to a particular person before leaving the job site, remembering to check to see that all tools are recovered at the end of any work performed, discussing the work order report with the customer's maintenance staff, and so on.

The Recommended Repairs function provides a list to the technician of maintenance oriented repairs that the technician can suggest to the customer. This information can also be customized based upon the particular customer or the particular parts which were known to be worked on during the job.

The Work Order Report button is used when the technician has completed the previous five functions, and is ready to prepare a copy of the work order to present to the customer. The information discussed above when discussing the Work Order Summary is included in the work order report, along with billing information, customer information and technician information. This information is presented on screen, and in one mode of the present invention can also be printed if a hard copy is needed.

Once the client is presented with a copy of the work order report, the client can sign the screen of the technician system, which will capture the signature and use this as an acknowledgment of the work order. The details of this system will be described below with reference to FIGURE 8B.

Once the work order is signed off on and complete, the status of the technician is automatically reset to available, and the next work order to be performed (if there is one currently queued for this technician) will pop up.

At the end of a work period, such a work week or bi-weekly pay period, the technician system will present the technician with a time sheet which represents the hours worked by the technician during that work period. An example of such a time sheet is shown in FIGURE 8A. This time sheet includes basic information about the time worked such as the work order 850 with which the time is associated and the job

site 855 at which the work was performed. The time sheet also includes the length of time 860 worked at each such site on each such date and the pay rate associated with that time. Different pay rates may be associated with straight time and overtime as is traditional in wage-based pay systems.

5 This information is sent to the technician system from the service center system database. When the information is presented to the technician, he may review it for accuracy. Once reviewed, the technician can either acknowledge the time record as accurately representing the work that he has performed during that period, or he can
10 contest it if necessary. If the technician chooses not to acknowledge the record, he simply his cancel to exit the time sheet review screen. This will signal the service center system that further inquiry must be made into this technician's time sheet.

 If the technician agrees with the time sheet as presented, he can press the "Signature" button, which will bring up a screen as shown in FIGURE 8B. When this
15 screen is presented, the technician can sign his name directly on the screen 875 of the device, where it will be captured and sent to the service center system as acknowledgement of the accuracy of the time sheet presented.

 By using this system of "signing" the time sheet entries on the remote system, the technician is freed from the necessity to travel to a central office or some other physical location in order to turn in and sign his time sheet for the pay period.
20 Combined with the other remote functions described above, the technician can now operate for significant periods of time without the need to return to a central office of any kind. This may provide a significant advantage for FSO's which operate over a large geographic area, or which have small branch operations located at some distance from the central facility.

25 A similar system to the signature screen presented in FIGURE 8B is used for customer sign-offs on jobs in another mode of operation of the current invention. After the customer has reviewed the work order summary and cost presented by the technician, the technician may press the signature button, and a customer signature screen similar to that shown in FIGURE 8B will be produced. However, in one
30 embodiment of the present invention, the display of the signature screen will be rotated 180 degrees such that the customer can sign the screen while the technician holds the

system for him. Alternatively, the appearance of the signature screen can be adjusted by the technician to use either a normal or a rotated orientation as is appropriate.

EXPEDITED PARTS PROCUREMENT

5 In modes of operation which provide expedited parts procurement, a parts repository system is connected to the service center system via a communications medium, as shown in FIGURE 1. While not all modes of operation of the present invention need to include a parts repository, the inclusion of such a system enhances the operation of the field service management system. Expedited parts procurement
10 through the parts repository 150 allows the technician to specify the equipment needed to effect the repair to the job site, determine its current price and availability, and place an order for the parts in real time while working on the job. This eliminates delay, and in some cases, may even allow the technician to pick up the part immediately and perform the repair work without a separate return visit at a later date.

15 As discussed above, the parts repository 150 may represent an independent parts vendor, a warehouse associated with the FSO, a warehouse associated with the field service management company, or may even represent more than one of these. Furthermore, the parts repositories may be mobile in certain modes of the present invention, allowing for rapid, real-time delivery of parts to technicians on the job site.

20 Information is sent to the parts repository in response to activity by the technician on the "Parts" screen which is accessed from the "Equipment Worked On" screen of the "WORK PERFORMED" tab in the technician system. When the technician enters the "Parts" screen, a list of parts used in repairing or replacing components of the currently selected piece of equipment is presented. This list is
25 generally resident on the technician system at all times, although it can be updated or re-downloaded as needed (e.g. if the information is updated when parts become obsolete or are replaced with newer models).

The technician selects the type and quantity of parts that he will need to get in order to complete the repairs on the current equipment, and this information is sent to
30 the service center system for relay to the parts repository. In one aspect of this communication, the message may be sent using email or other one-way communications

services as are known in the art to send a single message from the technician system to the parts repository. This message may specify the model number of the parts needed as well as the quantity. Once this message is sent, the technician may continue his work until a return message is received via email giving the price and availability of the parts requested.

In other aspects of the communication between the technician system and the parts repository, an application is running on the parts repository system which is configured to automatically respond to requests for pricing and availability information requests from technicians using the service center system. This sort of communication is sent to the service center system and then relayed from the service center system to the parts repository system via the Internet or other communications media.

When this information is returned to the technician system, he can immediately choose to order the parts, either for pickup if there is a distribution outlet with the parts available in the nearby area, or for delivery to the job site. In cases where the parts repository is itself a mobile warehouse as described above, the parts may be delivered directly to the job site immediately upon their order by the technician. In cases where the parts may not be available rapidly, the technician can then schedule a time to return to the job site and complete the repair.

In further aspects of expedited parts procurement, the parts repository system is tied into the inventory control system of the parts vendor and this allows for more fully automatic transactions between the technician and the parts vendor through the service center system and the parts procurement system.

MOBILE COMMUNICATIONS

Because the communications between the service center system and the technician system involves a connection to a mobile system, it is desirable that there are multiple means available for the technician system to exchange data with the service center system. One aspect of the present invention makes use of dial-up land line telephone connections between the technician system and the service center system. These connections are made whenever the technician is at a location where it is

convenient and appropriate for the technician system to be physically connected to a land line phone.

Although these connections are reliable and nearly universally available, a connection using a land line phone requires that the technician system is not moving far from the landline port during this connection. As a result, this sort of connection is not desirable for all circumstances in which the technician system is operated. For these circumstances, it is advantageous for there to be a wireless connection of some kind between the mobile technician system and the service center system.

Such wireless connections can include systems such as cellular modems, both analog and digital, wireless alpha-numeric pager based communications, and wireless Internet access. In one mode of operation, wireless Internet access is made available for the technician system using a wireless Internet transport protocols known in the art, such as Ardis, Mobitex or WinSock based communications networks. In a particularly advantageous mode of operation, multiple wireless transport protocols are supported by the technician system, as well as allowing for manually initiated dial-up connections. In this way, the technician system is able to be in communication with the service center system as much as possible in as seamless a way as possible.

In addition to providing for wireless data exchange between the technician system and the service center system, it is beneficial for the communications media in use between the service center system and the technician system to be able to automatically reconnect after an unanticipated disconnection, and to automatically recover messages which may have been in transit during the disconnection.

These recovery and reconnect functions are configured to occur without need for intervention by the technician. As soon as a communications link is available, communications are made between the remote system and service center system as necessary. If the link is broken, communications are queued (as discussed below) and then restarted upon reestablishment of a communications link. An example of one system in accordance with the present invention is shown in FIGURE 9 and discussed below.

The architecture shown in FIGURE 9 shows one possible mode of connecting a service center system 110 and a remote technician system 140. Each system comprises

the system itself, a message queue 940, 960, and a message agent 950, 980. The illustrated and described architecture uses the Internet as a communications backbone, but those of skill in the art will recognize that wireless communications embodiments in accordance with the present invention need not include the Internet.

5 In order to send a message from the service center system 110 to the technician system 140, the message, once created, is passed on to the message queue 940 of the service center system. Messages are stored in the queue with a status associated with the message until such time as the message is known to have been properly received by the technician system.

10 The host message agent (HMA) 950 periodically reads the messages in the queue and examines their status. Messages which have not yet been sent are taken by the HMA and forwarded to the Internet Service Provider (ISP) 910 being used by the service center system. The status of the message in the queue is updated to reflect when it has been sent. Once the message is passed to the ISP, the ISP forwards the message
15 to the appropriate Internet 900 systems as determined by the destination Internet address of the message. This routing function is a standard function performed by Internet systems as understood by those of skill in the art.

 In the shown embodiment, the destination address will correspond to wireless communications system which is capable of communicating with the technician system
20 140. Generally this will be accomplished through the use of an ISP that provides wireless connections. Such a Wireless Internet Service Provider (WISP) 920 is shown in FIGURE 9. The WISP sends the message to various transmission means in order to attempt to pass the message on to the technician system. In the illustrated architecture, the transmission system utilizes radio frequency transmitters corresponding to radio
25 frequency cells as used by a cellular communication network. The WISP 920 may pass the message to multiple cells 930 in order to more effectively deliver the message to the technician system 140.

 When the technician system 140 is within the coverage zone of one of the RF cells 930 and powered on, the wireless modem 980 or other wireless communications
30 device within the technician system will receive the signal containing the message from the service center system 110. This message is passed to a remote message agent

(RMA) 970 which executes on the technician system. The RMA passes the message to a queue 960 on the technician system which stores the message, along with its current status (received). The RMA then sends an acknowledgement back along the same path in reverse to the HMA indicating receipt of the message. The technician system reads messages from the queue 960 as they are received.

When the HMA 950 receives the acknowledgement, it updates the status of the message in the queue to indicate it was received. By periodically re-sending messages that have been sent but not acknowledged, this system allows both the technician system and the service center system to recover from any circumstance where a message or acknowledgement is lost during transmission or if one of the machines fails during transmission. This also accounts for any potential loss of communications which may occur when the technician system is not within range of any of the RF cells 930 or other wireless communications devices.

The same process is used in reverse when sending a message from the technician system 140 to the service center system 110. By periodically storing the messages from the queue and their status, the disclosed architecture can recreate any messages which were not acknowledged and recreate any transmissions which were made.

In circumstances where an automatic connection cannot be reestablished (*e.g.* due to interference with wireless networks or because the remote system is out of range of the available network coverage), the technician may choose to explicitly set up a connection over a land line or a dial-up cellular connection in order to exchange data with the server. However, if there is no urgent need for updated information, the technician may optionally wait until the next time an automatic communication can be established, at which time, the remote system and service center system will exchange any data necessary.

In order to accomplish this, the technician system and the service center system are configured to maintain a journal of messages that have been sent and received to the other. A separate journal representing the last known state of each message (send began, send completed, send completed out of order, and so forth). Based on this information, the systems will be able to know which messages were not successfully passed to the other system if communications are lost by searching their journals. When

connections are re-established, messages which were in progress can be resent and then processed in the correct order.

These journals and the logic to properly handle the transmission and receipt of these wireless messages are handled by the HMA and RMA. In one operating mode of the present invention, the RMA and HMA are configured such that the RMA and HMA automatically initiate communications whenever the technician system is within the range of a valid wireless communications network.

The various embodiments of the field service systems described above in accordance with the present invention thus provide a method to manage a number of remotely operating field service technicians from a central site effectively. The technicians need not report into a central physical location manually, nor need they make a large number of phone calls to conduct routine business with the office. Furthermore, much of the necessary tracking of information is performed automatically.

Of course, it is to be understood that not necessarily all such objects or advantages may be achieved in accordance with any particular embodiment of the invention. Thus, for example, those skilled in the art will recognize that the invention may be embodied or carried out in a manner that achieves or optimizes one advantage or group of advantages as taught herein without necessarily achieving other objects or advantages as may be taught or suggested herein.

Furthermore, the skilled artisan will recognize the interchangeability of various features from different embodiments. For example, the technician system and service center system as described above may be used with an office system which is more limited than that described herein and without the use of a parts depository at all. In addition to the variations described herein, other known equivalents for each feature can be mixed and matched by one of ordinary skill in this art to construct anchoring systems and retainers in accordance with principles of the present invention.

Although this invention has been disclosed in the context of certain preferred embodiments and examples, it therefore will be understood by those skilled in the art that the present invention extends beyond the specifically disclosed embodiments to other alternative embodiments and/or uses of the invention and obvious modifications and equivalents thereof. Thus, it is intended that the scope of the present invention herein

WHAT IS CLAIMED IS:

1. A method for sending a message from a service center system to a remote system, comprising:

5 providing a first message queue for the service center system to store the status of the message;

providing a second message queue for the remote system to store the status of each message received;

connecting a host message agent to the first message queue;

10 connecting a remote message agent to the second message queue;

passing the message from the first message queue to the host message agent;

updating the status of the message in the first message queue;

15 sending the message from the host message agent to the remote message agent across a communications medium;

passing the message from the remote message agent to the second message queue;

updating the status of the message in the second message queue;

20 sending an acknowledgment of the message from the remote message agent to the host message agent across the communications medium;

updating the status of the message in the first message queue.

2. The method as in Claim 1 where the host message agent will periodically send the message again if an acknowledgement of the message is not received.

25

3. The method as in Claim 1 wherein the communication medium comprises at least in part the Internet.

4. The method as in Claim 3 wherein the remote system communicates with
30 the Internet via a wireless communications network.

5. The method as in Claim 4 wherein the wireless communications network is a cellular radio frequency network.

5 6. The method as in Claim 1 wherein the communications medium is available between the host message agent and the remote message agent on an intermittent basis.

7. A system for sending a message from a service center system to a remote system, comprising:

10 a first message queue in communication with the service center system;
a host message agent in communication with the first message queue;
a remote message agent in communication with the host message agent via a communications medium;
a second message queue attached to the remote message agent and to the
15 remote system;
the first message queue configured to store the message and the status of the message, and to receive updates to the status of the message from the host message agent, the host message agent sending the message to the remote message agent across the communications medium, the remote message agent
20 sending an acknowledgement of the message to the host message agent upon receipt of the message, and the remote message agent passing the message to the second message queue for access by the remote system.

8. The system as in Claim 7 wherein the host message agent periodically
25 sends the message to the remote system again until an acknowledgement is received.

9. The system as in Claim 7 wherein the communications medium comprises at least in part the Internet.

30 10. The system as in Claim 9 wherein the remote message agent communicates with the Internet via a wireless network.

11. The system as in Claim 7 wherein the communications medium is available between the host message agent and the remote message agent on an intermittent basis.

5 12. A method of managing service information at a remote system, comprising:

 receiving a work order, including service specific data for a requested service for equipment, wherein said work order includes tasks to be performed while providing said requested service;

10 displaying the work order on a touch sensitive display of said remote system;

 checking off one or more of the displayed tasks by touching a portion of the touch sensitive display related to a corresponding task;

 transmitting a parts order related to said requested service;

15 receiving a customer's signature entered on said display; and
 closing the work order.

 13. The method as defined in Claim 12, further comprising transmitting status information related to said requested service to a service center.

20 14. The method as defined in Claim 12, further comprising receiving a service history of said equipment.

 15. The method as defined in Claim 12, further comprising:

25 providing a first icon towards a first side of said touch sensitive display, said first icon sized to be activated by an operator's first thumb, wherein activation of said first icon causes a cursor to move in a first direction; and

 providing a second icon towards a second side of said touch sensitive display, said second icon sized to be activated by an operator's second thumb,
30 wherein activation of said second icon causes said cursor to move in a second direction

16. The method as defined in Claim 12, wherein said remote system executes a Windows CE operating system.

5 17. The method as defined in Claim 12, wherein said work order is viewable using an Internet HTML-compatible browser executing on said remote system.

18. A method of managing service information at a service center, comprising:

10 receiving a customer request for service;
 automatically selecting which technician should provide the requested service;

 generating a work order, including service specific data for the requested service, wherein at least a portion of service specific information is
15 automatically entered from a database;

 sending the work order to the selected technician; and
 receiving confirmation that the work order was received.

19. A method as in Claim 18 where the step of sending the work order to the
20 selected technician comprises transmitting the work order over a wireless network to a remote system associated with the technician.

20. The method as defined in Claim 18, wherein the technician is selected based on at least the technician's proximity to the equipment to be serviced.

25 21. The method as defined in Claim 18, wherein the technician is selected based on at least a customer preference.

22. The method as defined in Claim 18, further providing the technician with
30 instructions on how the service is to be performed.

23. The method as defined in Claim 19, further providing the technician with a procedures form displayed on a touch sensitive display of said remote system, wherein the form includes service instruction steps which are configured to be checked off by the technician as the steps are completed.

5

24. The method as defined in Claim 19, further providing the technician with a catalog of parts which may be need for the service operation.

25. A system including a server couplable to a plurality of client computers, said server configured to execute instructions comprising at least:

10

a first instruction used receive a customer request for equipment service;

a second instruction used to select which technician should provide the requested service;

15

a third instruction configured to generate a work order based on at least the customer request;

a fourth instruction configured to transmit the work order over a wireless network to a first client computer associated with the selected technician; and

a fifth instruction configured to receive confirmation via the first client computer that the work order was received.

20

26. The system as defined in Claim 25, further comprising:

a first client computer, where said first client computer is coupled to said server; and

25

a second client computer coupled to said server, wherein said first client computer is associated with a first service company and said second client computer is associated with a second service company.

30

27. The system as defined in Claim 25, further comprising said first client computer networked to said server, wherein if said network is interrupted, said first client computer operates autonomously.

28. The system as defined in Claim 25, further comprising a pager coupled to receive information related to the work order from the server.

5 29. The system as defined in Claim 25, wherein said work order is generated as an HTML-compatible form readable using a browser executing on said first client.

30. The system as defined in Claim 25, wherein said server provides data to said client computers using at least a first customizable template.

10 31. The system as defined in Claim 25, wherein said server receives status data from at least said first client computer, and uses the status information to generate a bill.

32. A method of transmitting a work order, comprising:
15 providing a selection of protocols from which the user can choose at least one to be used to transmit data, said data including at least a work order;
receiving a protocol selection from said user;
generating a work order using a service center system in response to a service request; and
20 transmitting said work order to a remote system using said selected protocol.

33. The method as defined in Claim 32, where said remote system executes a Windows operating system.
25

34. The method as defined in Claim 32, where said remote system executes a Windows CE operating system.

35. The method as defined in Claim 32, where said remote system executes a
30 Palm operating system.

36. A method of transmitting a service-related message from a service center system to a remote system over a wireless network, comprising:

generating a service-related message in said service center system;

providing the service-related message to a first software module
executing in said service center system;

transmitting the service related message from the first software module
over the Internet to a radio frequency cell transmitter which forms part of a
wireless network; and

transmitting the service-related message from the cell transmitter to a
second software module executing in the remote system, wherein said remote
system further executes field service software.

37. The method of Claim 36, wherein said first software module is a host
messaging agent, and second software module is a remote messaging agent.

38. The method of Claim 36, wherein the structures of said first software
module and said first software module are symmetric.

39. The method of Claim 36, wherein said first software module and said
first software module use the same application program interface.

40. The method of Claim 36, further comprising making the first software
module appear logically connected directly to said wireless network.

41. The method of Claim 36, wherein the service related message is
transmitted only once over said wireless network.

42. The method of Claim 36, wherein said first software module is
configured to transmit data at a first rate, and second software module is configured to
receive data at a second rate which is different than said first rate.

43. A method of transmitting a service-related message from a server to a client over a wireless network, comprising:

generating a service-related message in said server;

determining that the client is disconnected from the server;

5 storing the service-related message in a queue while the client is disconnected; and

transmitting the service-related message from the queue to the client when the client is reconnected to the server.

10 44. A method of providing a computer user interface comprising:

displaying a first tab associated with a first page on a touch-sensitive portable computing device display, wherein said first tab is sized to be activated by an operator's first thumb; and

15 displaying a second tab associated with a second page on said touch-sensitive portable computing device display, wherein said second tab is sized to be activated by an operator's second thumb

METHOD AND SYSTEMS FOR WIRELESS COMMUNICATION FOR A FIELD SERVICE SYSTEM

5

Abstract of the Disclosure

10

A mobile field service system comprises a service center which is connected to the office of a field service organization and number of customers of the field service organization via the Internet or another computer network. The service center is also connected to the mobile systems of technicians who work for the field service organization by a mobile communications system such as a wireless Internet service provider. Information regarding problems which require a service call are sent from the customers to the service center, where work orders are automatically generated based on the problem submitted and information stored within the service center system regarding that particular client and his site. This work order is dispatched to an available technician, who receives the work order from the service center via the wireless network. The technician then proceeds directly to the job site to perform the work on the work order and perform the necessary diagnostic and repair steps. Information to guide the technician is available via the mobile technician system. A message queue is used on each system in order to increase the reliability of communications between the systems. By using such a queue, messages will not be lost and the communications can be made transparent to the user of the remote system.

15

20

25

H:\DOCS\RAD\RAD-1467.DOC
081300

Fig. 1

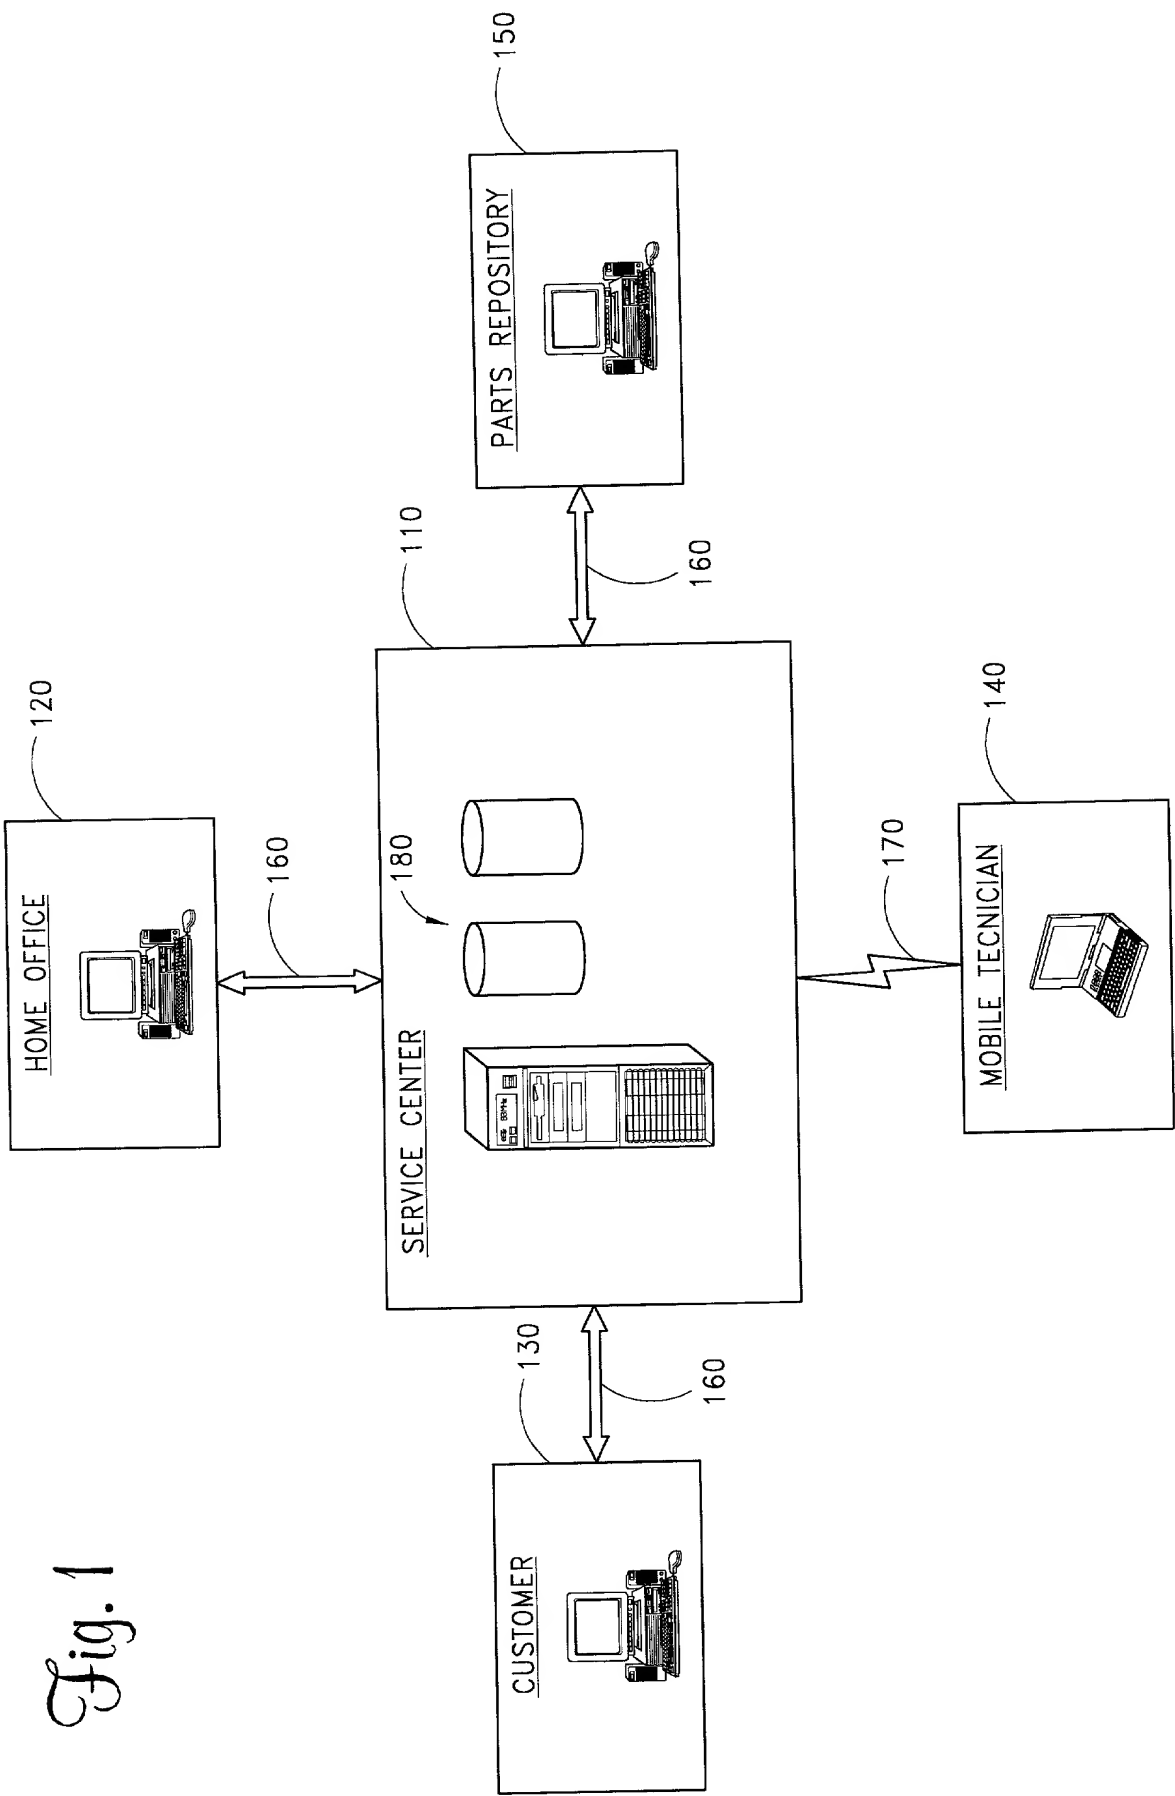


Fig. 2

Home		Techs & Calls		Work Orders		Job Sites		Employees		Customers		Admin		Alerts	
Work Order		42													

Work Order Status							
Details	Tech #	Tech Name	WO Status	Tech Status	Date/Time Entered	Date/Time Sent	Source
Labor	41	Terry Buckley	Complete	Available	04/07/2000 11:15 AM	04/07/2000 11:15 AM	Tech - Terry Buckley
Parts	41	Terry Buckley	Signature	Signature	04/07/2000 11:14 AM	04/07/2000 11:14 AM	Tech - Terry Buckley
Work Done	41	Terry Buckley	In progress	At job site	04/07/2000 10:15 AM	04/07/2000 10:15 AM	Tech - Terry Buckley
Repairs Found	41	Terry Buckley	In progress	In route	04/07/2000 10:00 AM	04/07/2000 10:02 AM	Tech - Terry Buckley
Status	41	Terry Buckley	Acknowledged		04/07/2000 10:00 AM	04/07/2000 10:00 AM	Tech - Terry Buckley
	41	Terry Buckley	Received		04/06/2000 08:31 AM	04/06/2000 08:31 AM	Tech - Terry Buckley
	41	Terry Buckley	Sent		04/05/2000 04:39 PM	04/05/2000 04:39 PM	Tech - Terry Buckley
Equipment	41	Terry Buckley	Dispatched		04/05/2000 04:39 PM	04/05/2000 04:39 PM	Dispatch - Bob Nabers
Billing info			Open		04/05/2000 03:51 PM	04/05/2000 03:51 PM	Dispatch - Bob Nabers
PM							

Customer Sign-Off			
Signature	Title	Signature Type	Date/Time
Lacey Moroneso		Complete	04/07/2000 11:19 AM

Tech #	Tech Name
41	Terry Buckley

Fig. 2

Home

Techs & Calls

Work Orders

Job Sites

Employees

Customers

Admin

Alerts

42

?

X

Work Order

42

Details

Work Order Status

Tech #	Tech Name	WO Status	Tech Status	Date/Time Entered	Date/Time Sent	Source
41	Terry Buckley	Complete	Available	04/07/2000 11:15 AM	04/07/2000 11:15 AM	Tech - Terry Buckley
41	Terry Buckley	Signature	Signature	04/07/2000 11:14 AM	04/07/2000 11:14 AM	Tech - Terry Buckley
41	Terry Buckley	In progress	At job site	04/07/2000 10:15 AM	04/07/2000 10:15 AM	Tech - Terry Buckley
41	Terry Buckley	In progress	In route	04/07/2000 10:00 AM	04/07/2000 10:02 AM	Tech - Terry Buckley
41	Terry Buckley	Acknowledged		04/07/2000 10:00 AM	04/07/2000 10:00 AM	Tech - Terry Buckley
41	Terry Buckley	Received		04/06/2000 08:31 AM	04/06/2000 08:31 AM	Tech - Terry Buckley
41	Terry Buckley	Sent		04/05/2000 04:39 PM	04/05/2000 04:39 PM	Tech - Terry Buckley
41	Terry Buckley	Dispatched		04/05/2000 04:39 PM	04/05/2000 04:39 PM	Dispatch - Bob Nabers
		Open		04/05/2000 03:51 PM	04/05/2000 03:51 PM	Dispatch - Bob Nabers

Customer Sign-Off

Signature	Title	Signature Type	Date/Time	Tech #	Tech Name
Lacey Moroneso		Complete	04/07/2000 11:19 AM	41	Terry Buckley

Work Done

Repairs Found

Status

Equipment

Billing Info

PM

Fig. 2

Home

Techs & Calls

Work Orders

Job Sites

Employees

Customers

Admin

Alerts

Work Order

42

?

X

Details

Labor

Parts

Work Done

Repairs Found

Status

Equipment

Billing Info

P.M.

Work Order Status

Tech #	Tech Name	WO Status	Tech Status	Date/Time Entered	Date/Time Sent	Source
41	Terry Buckley	Complete	Available	04/07/2000 11:15 AM	04/07/2000 11:15 AM	Tech - Terry Buckley
41	Terry Buckley	Signature	Signature	04/07/2000 11:14 AM	04/07/2000 11:14 AM	Tech - Terry Buckley
41	Terry Buckley	In progress	At job site	04/07/2000 10:15 AM	04/07/2000 10:15 AM	Tech - Terry Buckley
41	Terry Buckley	In progress	In route	04/07/2000 10:00 AM	04/07/2000 10:02 AM	Tech - Terry Buckley
41	Terry Buckley	Acknowledged		04/07/2000 10:00 AM	04/07/2000 10:00 AM	Tech - Terry Buckley
41	Terry Buckley	Received		04/06/2000 08:31 AM	04/06/2000 08:31 AM	Tech - Terry Buckley
41	Terry Buckley	Sent		04/05/2000 04:39 PM	04/05/2000 04:39 PM	Tech - Terry Buckley
41	Terry Buckley	Dispatched		04/05/2000 04:39 PM	04/05/2000 04:39 PM	Dispatch - Bob Nabers
		Open		04/05/2000 03:51 PM	04/05/2000 03:51 PM	Dispatch - Bob Nabers

Customer Sign-Off

Signature	Title	Signature Type	Date/Time	Tech #	Tech Name
Lacey Moroneso		Complete	04/07/2000 11:19 AM	41	Terry Buckley

Fig. 3

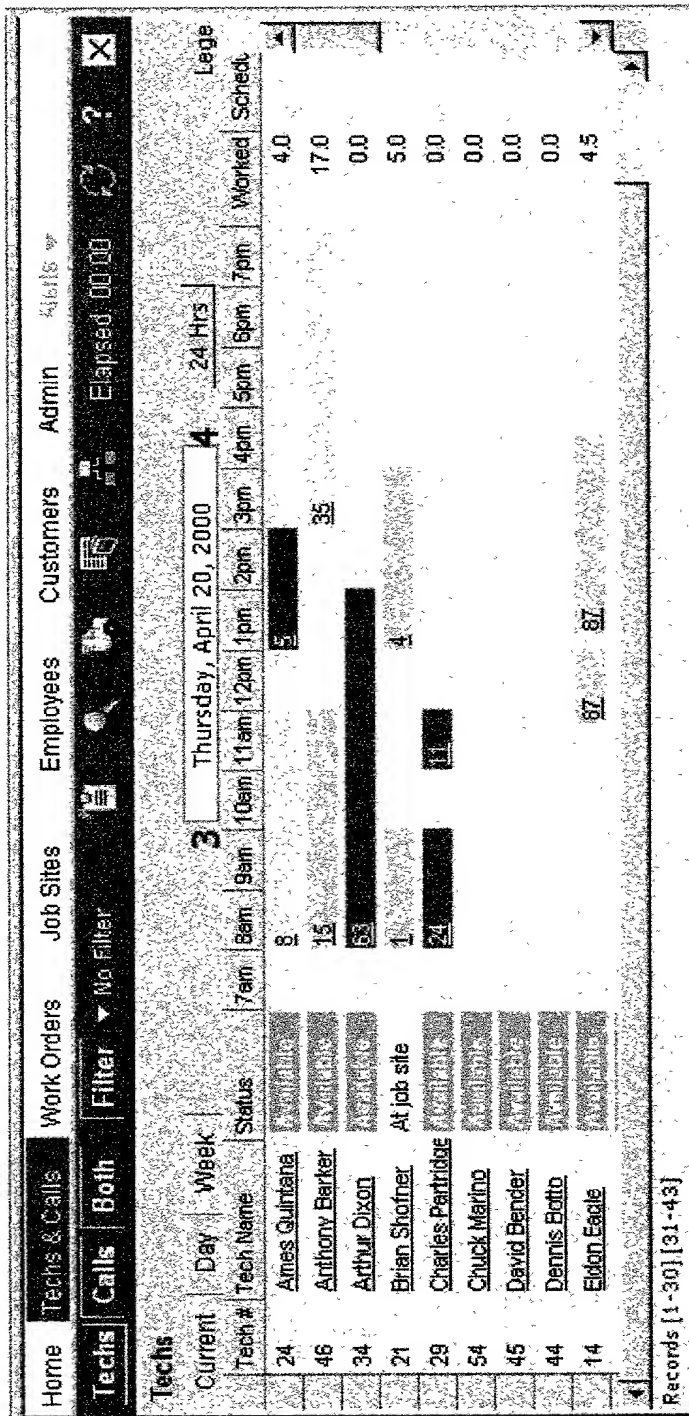


Fig. 3

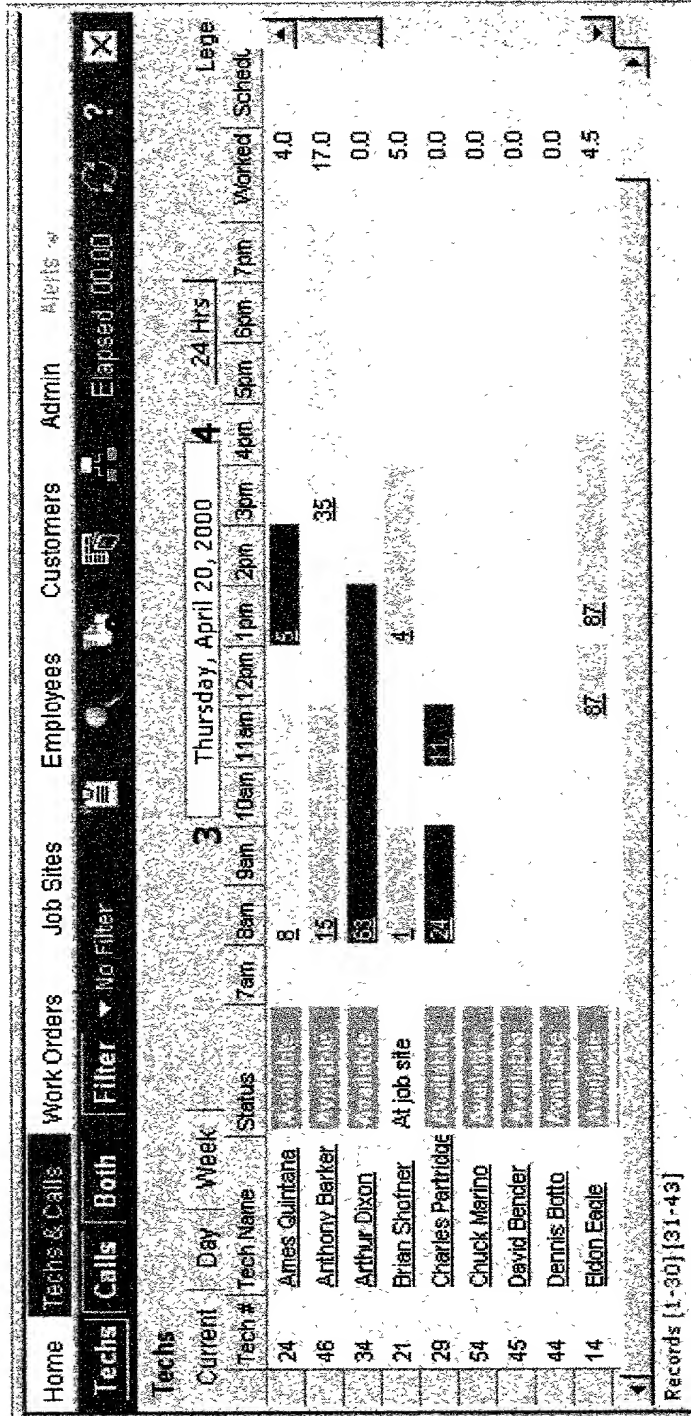


Fig. 3

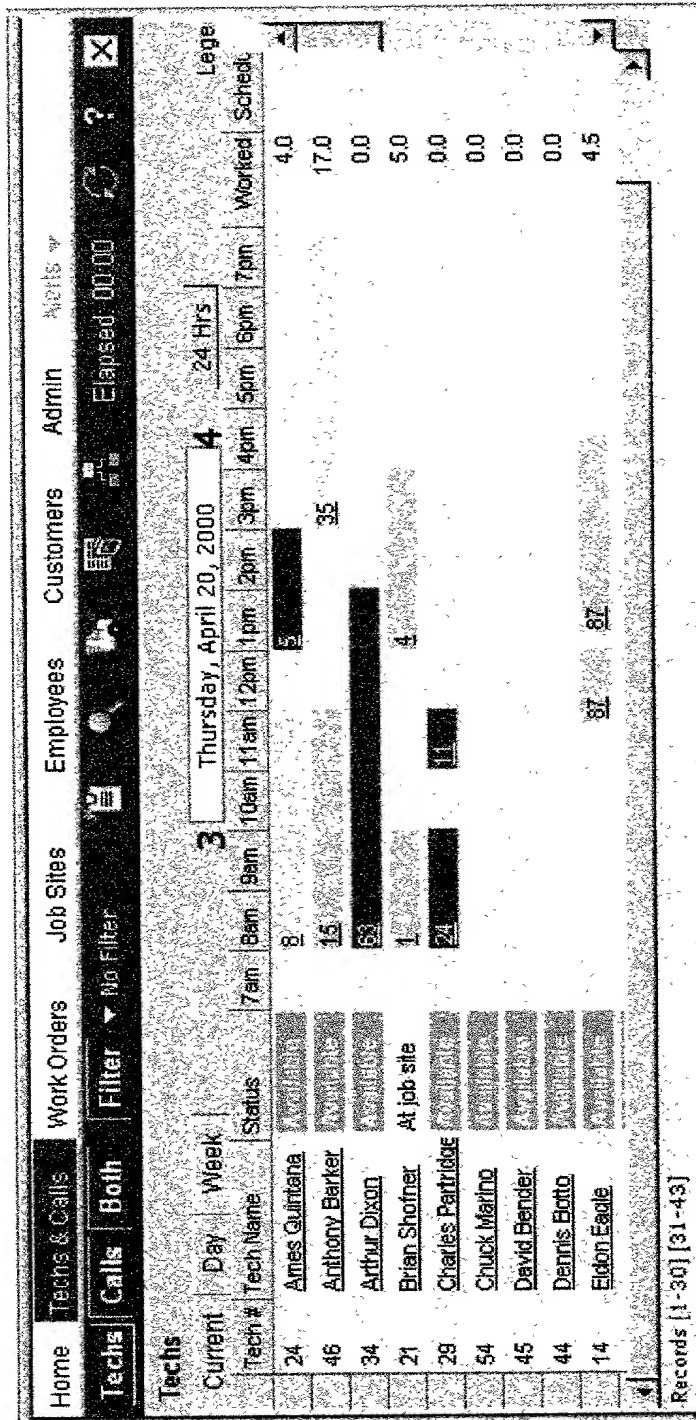


Fig. 3a-1

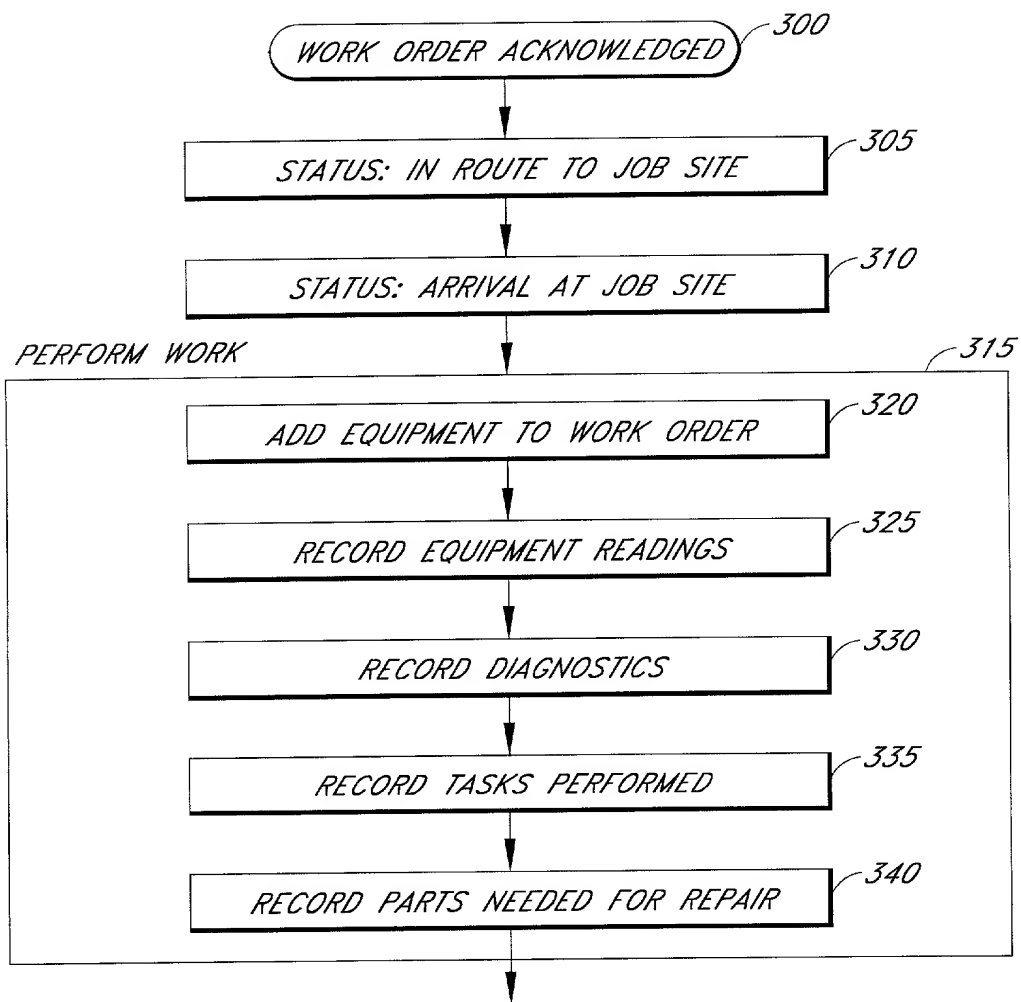


Fig. 3a-1

Fig. 3a-2

Fig. 3a-2

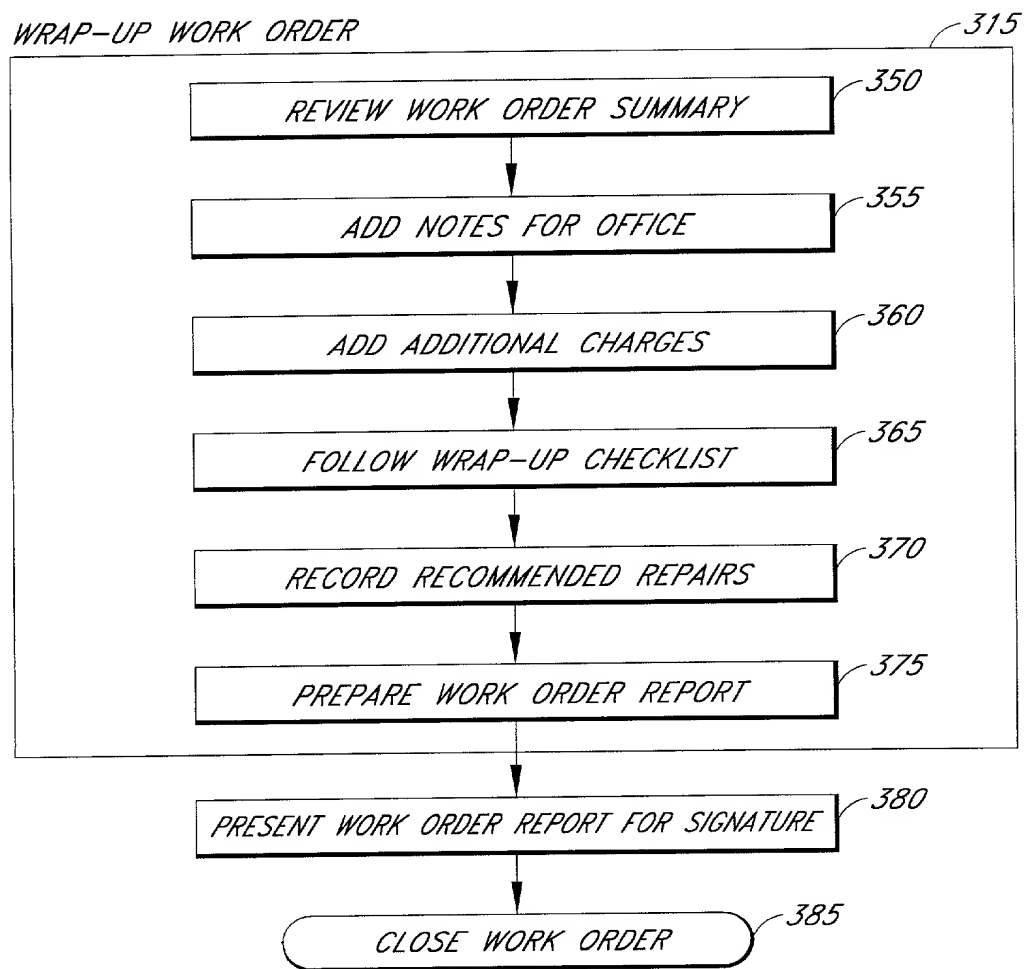


Fig. 4

430

410

420

Help		WO # 1001406006 - At Job Site - [00:04]		Status	OK
* Details Problem Job Notes Work Performed Wrap-up					
Location		View Map		Details	
ABC Industrial 123 Park Drive San Diego CA 92126				Site Rank Priority Job Type Est/Alloc Time Dispatcher Suite/Tenant Arrive By Project ID	
WO Contact		View All Contacts		View Site Profile	
Bill Peters (619) 555-4301					
Start	Desktop	Main M...	My Han...	ExWork...	3:14 PM

Fig. 4

Help	WO # 1001406006 - At Job Site - [00:04]				Status	OK	
Details Problem Job Notes Work Performed Wrap-up							
Location ABC Industrial 123 Park Drive San Diego CA 92126		View Map 420		Details Site Rank Priority Job Type S Est/Alloc Time 2 hours Dispatcher MBaker Suite/Tenant Arrive By Project ID			View Site Profile
WO Contact Bill Peters (619) 555-4301		View All Contacts					
Start	Desktop	Main M.	My Han...	Fax Wor...		3:14 PM	

Fig. 4

410

430

420

Help	WO # 1001406006 - At Job Site - [00:04]				Status	OK
* Details Problem Job Notes Work Performed Wrap-up						
Location		View Map		Details		
ABC Industrial 123 Park Drive San Diego CA 92126		420		Site Rank Priority Job Type: S Est/Alloc Time: 2 hours Dispatcher: MBaker Suite/Tenant Arrive By Project ID		
WO Contact		View All Contacts				
Bill Peters (619) 555-4301						
Start	Desktop	Main M...	FXAlert	My Han...	FXWork...	3:14 PM

Fig. 5

510

Help

WO # 12527 - At Job Site - [00:15]

Status

OK

Details

Problem

Job Notes

Work Performed

Wrap-up

Description

Boiler not functioning properly.

Request History

Start

Control Pa...

Main Menu

ExAlert


ExWorkList

11:50 AM

520

Fig. 5

510

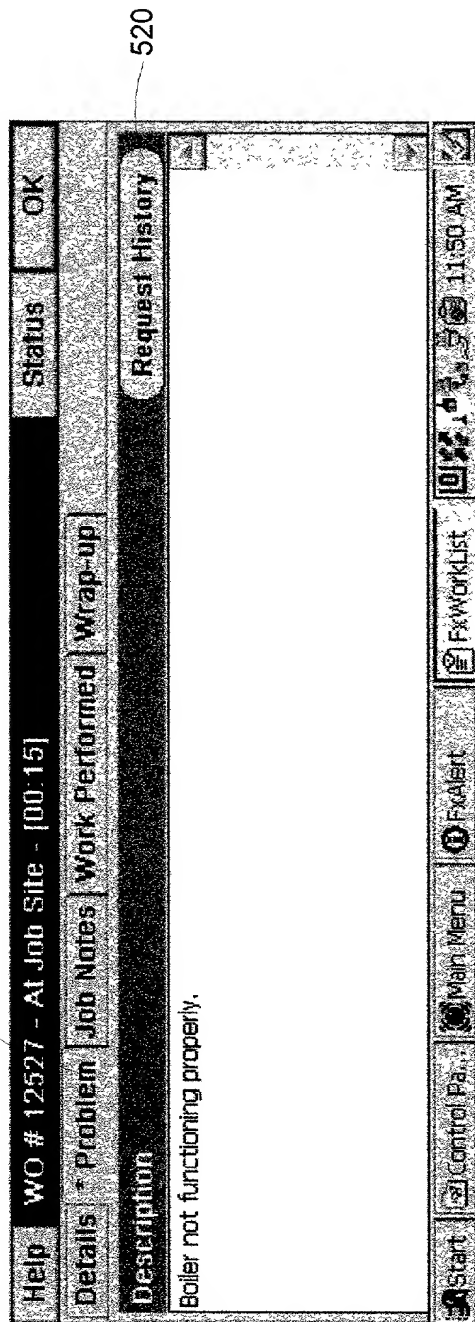

520

Fig. 5



Help	WO # 12527 - At Job Site - [00:15]			Status	OK
Details		Problem	Job Notes	Work Performed	Wrap-up
Request History					
<div> <div>4</div> <div>Boiler not functioning properly.</div> </div>					
Start	Control Pa...	Main Menu	Exit Alert	Exit WorkList	11:50 AM

Fig. 6

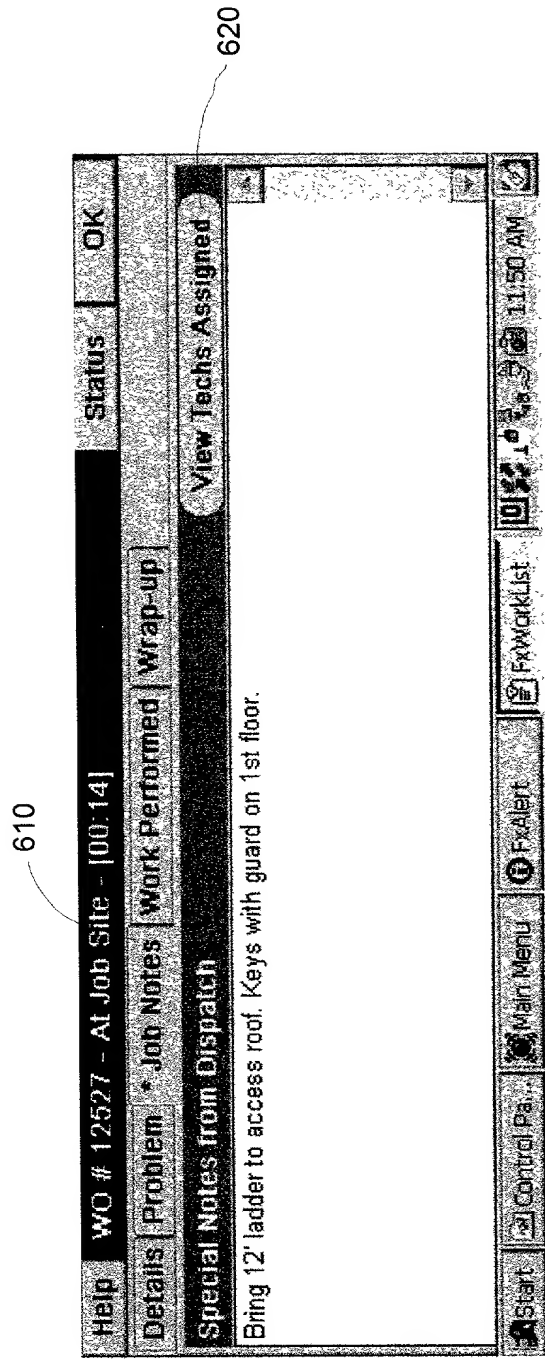


Fig. 6

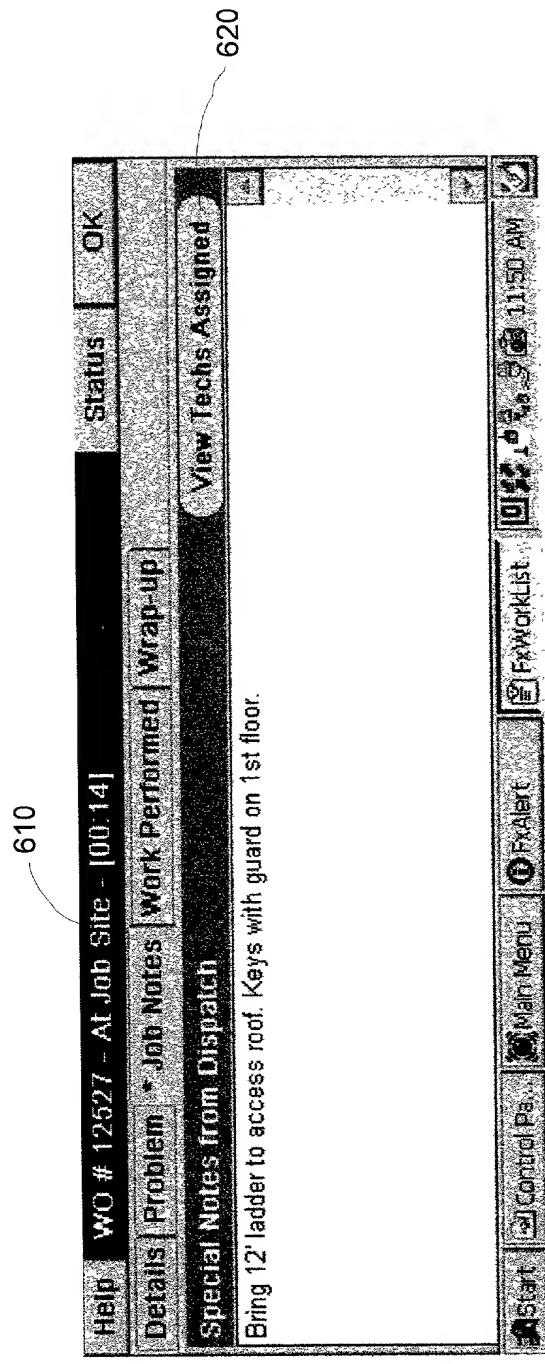


Fig. 6

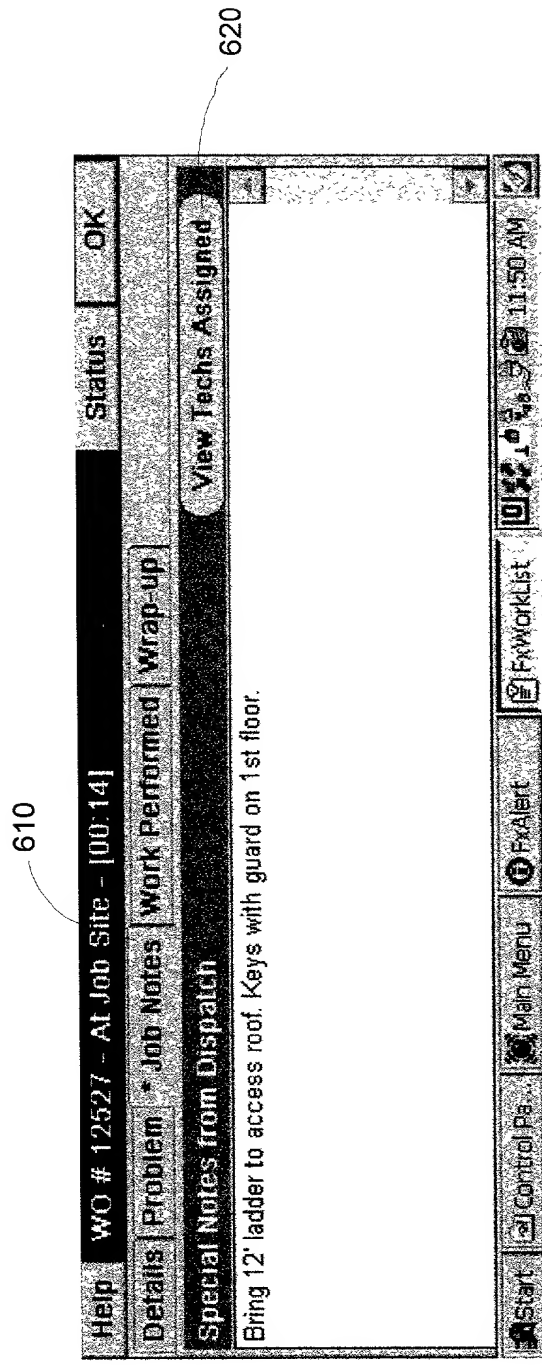


Fig. 7

710

720

Help	WO # 1001406006 - At Job Site - [00:38]				Status	OK
Details	Problem	Job Notes	* Work Performed	Wrap-up		
Equipment worked on:		Equip History	Equipment List	Remove Selected		
Type	Tag #	Readings	Diagnostics	Tasks	Parts	
Heat pump, package unit	#1	✓ Readings	✓ Diagnostics	✓ Tasks	Parts	

730

740

750

760

Start	Desktop	Main M...	ExAlert	My Han...	ExWor...	6:54 AM
-------	---------	-----------	---------	-----------	----------	---------

Fig. 7

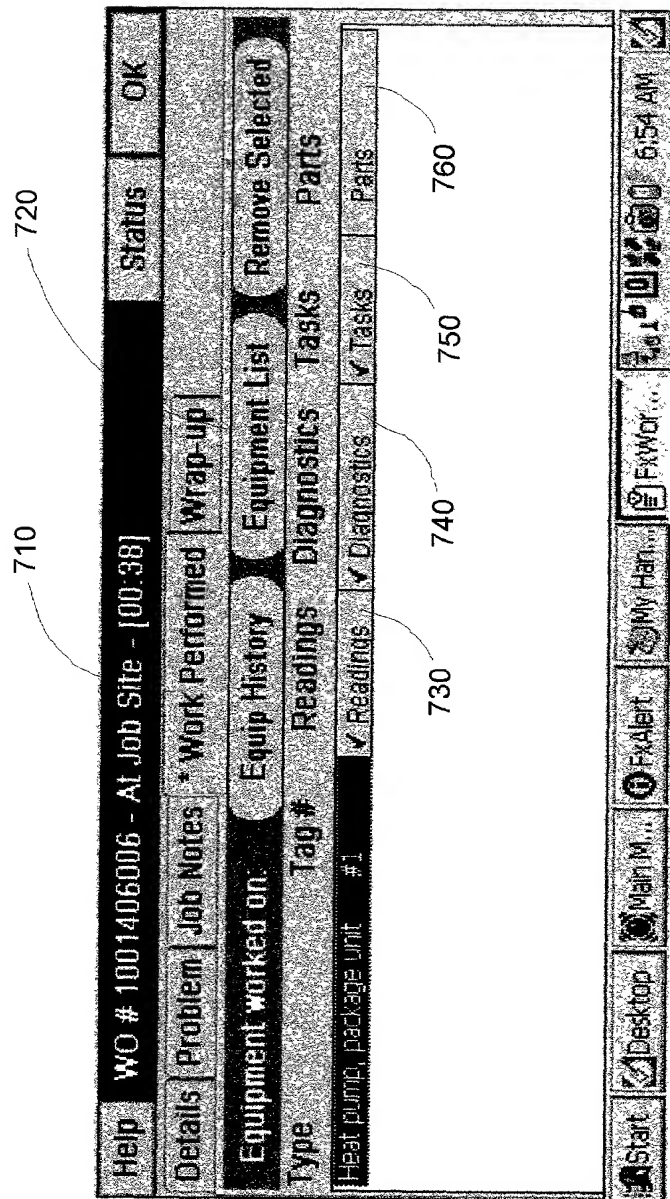


Fig. 7

710

720

Help

WO # 1001406006 - At Job Site - [00:38]

Status

OK

Details

Problem

Job Notes

Work Performed

Wrap-up

Equipment worked on:

Equip History

Equipment List

Remove Selected

Type

Tag #

Readings

Diagnostics

Tasks

Parts

Heat pump, package unit

#1

✓ Readings

✓ Diagnostics

✓ Tasks

Parts

730

740

750

760

Start

Desktop

Main M...

FixAlert

My Han...

FixWor...

6:54 AM

Fig. 7a

735

737

Help		Readings taken on New		Cancel	OK
Cond	unit	Elec	* General	Notes	
				Initial	Final
			Charge	Full/Sho	Full/Sho
			Crankcase htr		
			Defrost time (min)		
			Heater (amps)		
			High side (psi)	120	250
			Low heat lock (deg)		
			Low side (psi)	120	65
			Sub cooling (deg F)		
			Superheat (deg F)		

Stat Main Menu ExAlert ExWorkList 2:40 PM

Fig. 7a

735 737

Help		Readings taken on New		Cancel	OK
Cond	unit	Elec	* General	Notes	
			Initial	Final	
		Charge	Full/Sho	Full/Sho	
		Crankcase htr			
		Defrost time (min)			
		Heater (amps)			
		High side (psi)	120	250	
		Low heat lock (deg)			
		Low side (psi)	120	65	
		Sub cooling (deg F)			
		Superheat (deg F)			
Start	Main Menu	ExAlert	ExWorkList	2:40 PM	

Fig. 7a

735

737

Help		Readings taken on New		Cancel	OK
Cond unit	Elec	General	Notes		
Charge		Initial	Final		
Crankcase htr		Full/Sho	Full/Sho		
Defrost time (min)					
Heater (amps)					
High side (psi)		120	250		
Low heat lock (deg)					
Low side (psi)		120	65		
Sub cooling (deg F)					
Superheat (deg F)					
Start	Main Menu	ExAlert	ExWorklet	2:40 PM	

Fig. 7b

748

Diagnostics on New					Cancel	OK		
Help	Comp	Cool coil	Elec	Fans	* General-1	General-2	Motors	Notes
<input type="checkbox"/> Bad bearings					<input checked="" type="checkbox"/> Belt off			
<input type="checkbox"/> Bad belt					<input type="checkbox"/> Check valve frost			
<input type="checkbox"/> Bad reversing valve					<input type="checkbox"/> Coil frost			
<input type="checkbox"/> Belt broken					<input type="checkbox"/> Drain lines plugged up			
<input type="checkbox"/> Belt loose					<input type="checkbox"/> Low on charge			

Start	Man Menu	FxAlert	FxWorkList	My Handhel...	2:43 PM
-------	----------	---------	------------	---------------	---------

745

Fig. 7b

748

Help Diagnostics on New Cancel OK

Comp Cool coil Elec Fans General-1 General-2 Motors Notes

☐ Bad bearings ☒ Belt off

☐ Bad belt ☐ Check valve frost

☐ Bad reversing valve ☐ Coil frost

☐ Belt broken ☐ Drain lines plugged up

☐ Belt loose ☐ Low on charge

Start Main Menu ExAlert ExWorkList My Handhel 2:43 PM

745

Fig. 7b

748

Diagnostics on New					Cancel	OK		
Help	Comp	Cool coil	Elec	Fans	General-1	General-2	Motors	Notes
<input type="checkbox"/> Bad bearings						<input checked="" type="checkbox"/> Belt off		
<input type="checkbox"/> Bad belt						<input type="checkbox"/> Check valve frost		
<input type="checkbox"/> Bad reversing valve						<input type="checkbox"/> Coil frost		
<input type="checkbox"/> Belt broken						<input type="checkbox"/> Drain lines plugged up		
<input type="checkbox"/> Belt loose						<input type="checkbox"/> Low on charge		

Start

Main Menu

FxAlert

FxWorkList

My Handhel...

2:48 PM

745

Fig. 8

Help			WO # 12527 - At Job Site - [00:23]			Status		OK	
Details		Problem		Job Notes		Work Performed		* Wrap-up	
Work Order Summary				Recommended Repairs					
Notes for OFFICE ONLY				Work Order Report					
Additional Charges				Customer Signature					
Wrap-Up Check List									
Start		Control Pa...		Main Menu		FxAlert		FxWorkList	
								11:59 AM	

Fig. 8

Help		WO # 12527 - At Job Site - [00:23]		Status	OK
Details		Problem	Job Notes	Work Performed	* Wrap-up
Work Order Summary		Recommended Repairs			
Notes for OFFICE ONLY		Work Order Report			
Additional Charges		Customer Signature			
Wrap-Up Check List					
Start	Control Pa...	Main Menu	ExAlert	ExWorkList	11:59 AM

Fig. 8

Help			WO # 12527 - At Job Site - [DD:23]			Status	OK
Details		Problem	Job Notes	Work Performed	* Wrap-up		
Work Order Summary		Recommended Repairs					
Notes for OFFICE ONLY		Work Order Report					
Additional Charges		Customer Signature					
Wrap-Up Check List							
Start	Control Pa...	Main Menu	FxAlert	FxWorkList	11:59 AM		

Fig. 8a

855 860

850

Time Sheet Review

Help

< Prev

Next >

Weekly

Cancel

OK

W/O #	Cost Code	Job Site	Date	Reg	OT	PT	Reg	OT
1001406002	001	Porter, Inc.	06/1...	6:00	0:00	0:00	6:00	0:00
1001406006	001	Porter, Inc.	06/1...	2:00	0:00	0:00	2:00	0:00
1001406006	001	ABC Industrial	06/1...	1:26	0:00	0:00	1:26	0:00
1001406003	001	ABC Industrial	06/1...	2:01	0:00	0:00	2:01	0:00
Totals			4...	0:00	0:00	0:00	40:00	0:00

Signature

Start

Desktop

Main Menu

Exit Alert

Exit Worksheet

9:48 AM

Fig. 8a

855 860

850

Time Sheet Review

CancelOK

< PrevNext >

☒ Weekly

WFO #	Cost Code	Job Site	Date	Reg	OT	PT	Reg	OT
1001406002	001	Porter, Inc.	06/1...	6:00	0:00	0:00	6:00	0:00
1001406006	001	Porter, Inc.	06/1...	2:00	0:00	0:00	2:00	0:00
1001406006	001	ABC Industrial	06/1...	1:26	0:00	0:00	1:26	0:00
1001406003	001	ABC Industrial	06/1...	2:01	0:00	0:00	2:01	0:00
Totals			4...	0:00	0:00	0:00	40:00	0:00

Signature

StartDesktopMain MenuExAlertExWorklist9:48 AM

Fig. 8a

855 860

850

Time Sheet Review

CancelOK

< Prev

Next >

☒ Weekly

W/O #	Cost Code	Job Site	Date	Reg	OT	PT	Reg	OT
1001406002	001	Porter, Inc.	06/1...	6:00	0:00	0:00	6:00	0:00
1001406006	001	Porter, Inc.	06/1...	2:00	0:00	0:00	2:00	0:00
1001406006	001	ABC Industrial	06/1...	1:26	0:00	0:00	1:26	0:00
1001406003	001	ABC Industrial	06/1...	2:01	0:00	0:00	2:01	0:00
Totals			4...	0:00	0:00	0:00	40:00	0:00

Signature

Start

Desktop

Main Menu

PrintAlert

PrintWorkList

9:48 AM

Fig. 8b

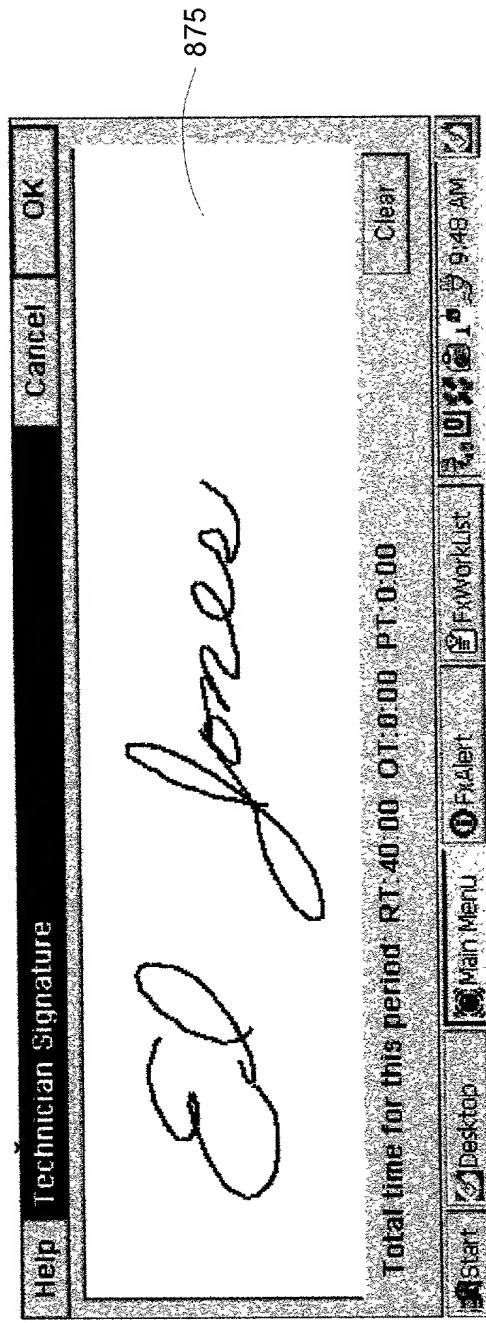


Fig. 8b

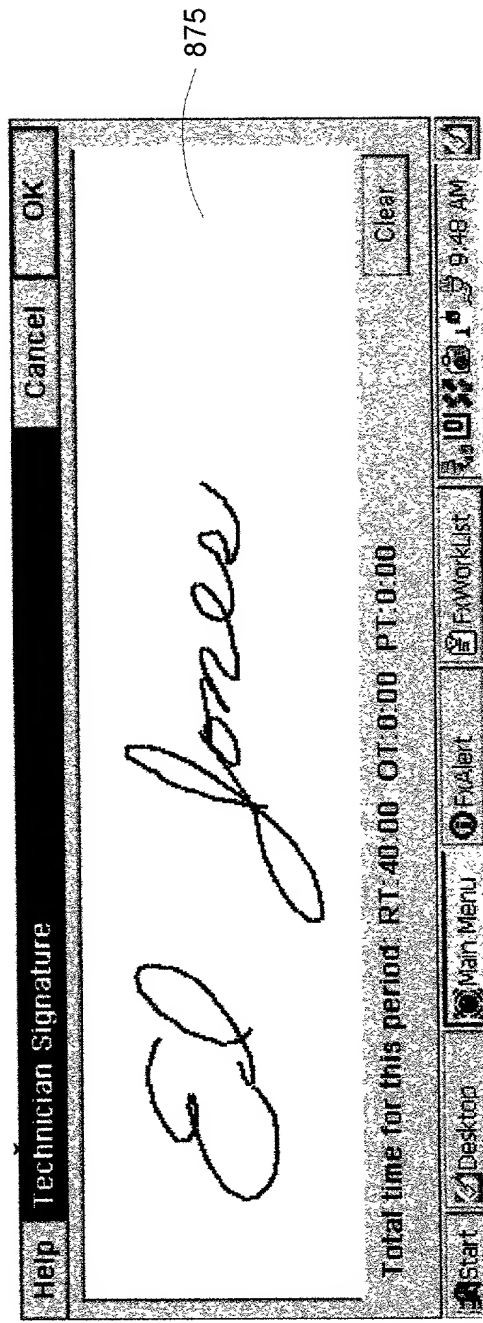


Fig. 8b

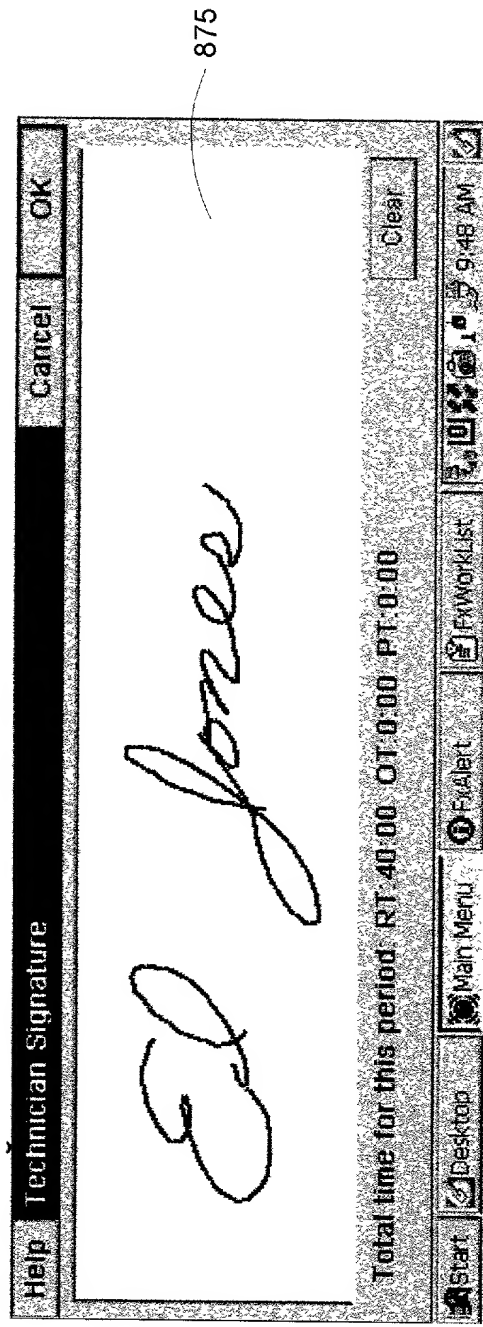


Fig. 9

